NBSIR 75-820

STUDY OF CRYOGENIC PROPELLANT SYSTEMS FOR LOADING THE SPACE SHUTTLE- PART II, HYDROGEN SYSTEMS

W.G. Steward

Cryogenics Division
Institute for Basic Standards
National Bureau of Standards
Boulder, Colorado 80302

October 1975

NBSIR 75-820

STUDY OF CRYOGENIC PROPELLANT SYSTEMS FOR LOADING THE SPACE SHUTTLE- PART II, HYDROGEN SYSTEMS

W.G. Steward

Cryogenics Division
Institute for Basic Standards
National Bureau of Standards
Boulder, Colorado 80302

October 1975

CONTENTS

LIST OF FIGURES

LIST OF TABLES

STUDY OF CRYOGENIC PROPELLANT SYSTEMS FOR LOADING THE SPACE SHUTTLE -
PART II, HYDROGEN SYSTEMS*

W. G. Steward

ABSTRACT

This report covers computer simulation studies of liquid hydrogen
fill and vent systems for the space shuttle. The computer programs
calculate maximum and minimum permissible flow rates during cooldown
as limited by thermal stress considerations, fill line cooldown time,
pressure drop, flow rates, vapor content, vent line pressure drop and
vent line discharge temperature. The input data for these programs
are selected through graphic displays which schematically depict the
part of the system being analyzed. The computed output is also dis-
played in the form of printed messages and graphs. Digital readouts
of graph coordinates may also be obtained.

Procedures are given for operation of the graphic display unit
and the associated minicomputer and timesharing computer.

Key words: Computer modeling; cooldown; cryogenic flow; stresses;
two phase flow.

PREFACE

It will be noted that non-SI units appear in many of the figures of this report. The
purpose of these figures is to illustrate typical displays as they appear on the screen
of the graphical display terminal. These units are consistent with the current practice
of KSC and are as desired by the KSC sponsor. Where dimensioned variables are mentioned
in the text, dual units are given.

1. Introduction

This is a final report under NASA Contract No. CC-37171A.

This report covers a continuation of computer simulation studies of cryogenic propellant
loading systems for the space shuttle. The preceding report, NBSIR 74-366, covered oxygen
loading systems and the present report extends this work to the hydrogen loading and vent
systems.

1.1 Objective

The objective of this study is to develop computer programs to determine thermal stress,
cooldown times, and liquid hydrogen loading rates whereby loading procedures can be checked
before a wet test of the actual system is conducted.

The programs of the oxygen studies which compute pressure spikes caused by water hammer
or rapid vaporization during cooldown have been deleted from the hydrogen studies in favor
of a more detailed analysis of the liquid loading rates and vent system. Since the pressure
spikes have amplitudes which are approximately proportional to the density of the liquid,
these spikes would be at least an order of magnitude smaller in hydrogen than in oxygen;
therefore, they would be negligible; therefore, computation options 2, 4 and 5 were deleted
from the hydrogen program. Contrarily, the effects of two phase flow during loading, vent
line temperatures, and vent line pressure drop are factors of concern in the hydrogen
system and were added to the present studies.

2. Graphic Display Computer Terminal

2.1 Description of Equipment

The system consists of a graphical display terminal interfaced with the KSC timeshare
computer through a 8000 word storage minicomputer and MODEM. Figure 1 shows the graphical
display unit and minicomputer.

Software for communication between the display unit and the KSC computer, routines for
schematic displays, input-output, and graphing are programmed into the minicomputer. These
routines are also stored on punched paper tape from which they may be reloaded if necessary.
The programs and subroutines used in the calculations are catalogued in the KSC computer
and are called as needed through the minicomputer software routines.
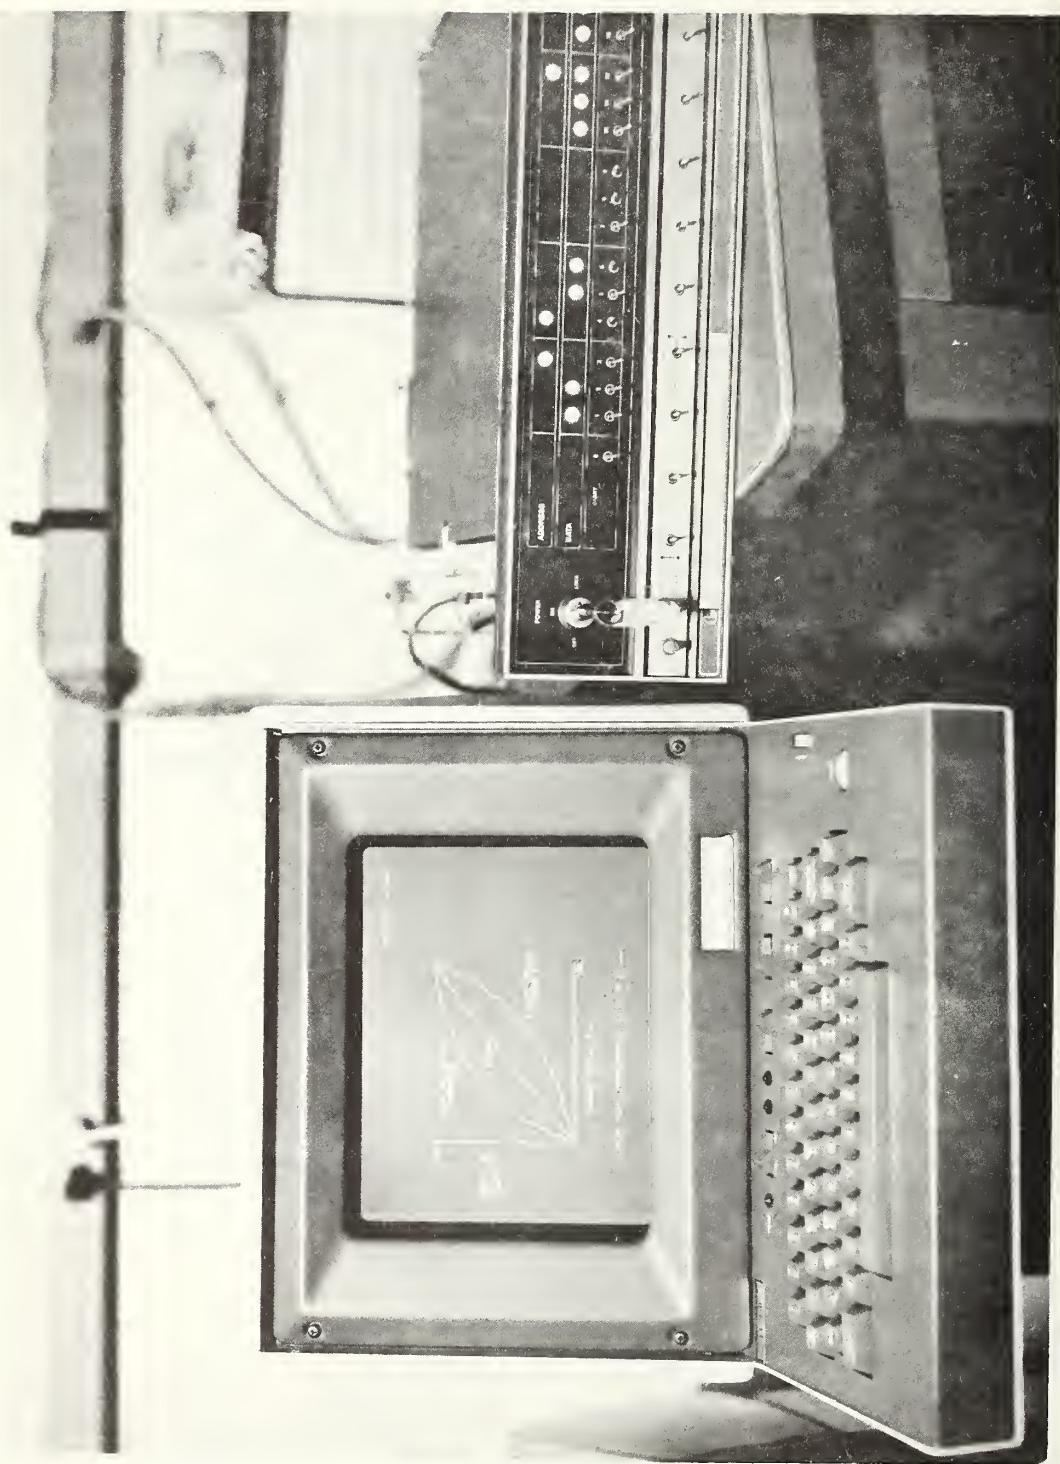
Figure 1. Graphic display terminal and minicomputer.

2.2 Description of the Minicomputer Software

The programs contained in the minicomputer control the information flow between the graphical display unit and the KSC timesharing computer. Besides the control function, the minicomputer has the input schematics with the associated input data and programs to interpret the responses received from the KSC timesharing computer (during execution of the hydrogen ground support computer program) in its memory.

The communication between the minicomputer system and the KSC computer is carried over a high speed telephone data line. The MODEM properly conditions the signals for the high speed data transmission.

Data is transmitted in various sized blocks with both horizontal and longitudinal parity. The receiving station checks for the parity errors in the incoming block of data and if the parity is correct, the transmission is accepted and an acknowledgment is returned to the sending station. If the parity of the received information is not correct, due to noise or other problems with the telephone line, the receiving station requests a retransmission. The sending station will then automatically retransmit the data. In some rare instances, the retransmission request is lost and the data must be manually retransmitted.

The minicomputer software has two basic modes of operation using the graphical display keyboard. The first mode, termed the manual mode, allows conversation with the KSC computer in a manner similar to a normal teletype except that the communication is at a high speed. The second mode of operation, termed the automatic mode, is used to run the computer programs simulating the hydrogen ground support equipment. Much of the communication between the minicomputer and the timesharing computer in the second mode is automatic, with no operator input required.

During operation in either mode, the graphical display terminal will emit an audible "beep" whenever an acknowledgment is received from the timesharing computer. This "beep" will inform the operator that a data block has been successfully sent and new information can be entered or a return can be expected from the timesharing computer. Until a successful transmission is affected, the keyboard of the graphical display unit is locked except to a control B, as explained in a later paragraph.

Operation in the manual mode allows for normal log-in procedures and the use of any subsystems on the KSC computer. Fortran, basic or the editing subsystem, may be employed in the manual mode.

Since the graphical display-minicomputer combination is connected to a terminal of the KSC timesharing system, operation in the manual mode is very similar to the general operation of the system as described in the manufacturer's manual. Log-on procedures as described in the manual are also valid for the graphic display unit.

During operation of the graphic unit, data entered on the screen of the graphics display are also entered into the memory of the minicomputer and when a carriage return is depressed, the data from the computer memory is transmitted to the timesharing computer. More than one line of data may be transmitted in a block if each line entered on the screen is terminated by a line feed and the entire block is terminated by a carriage return for transmission.

Typing errors can be corrected by using a control A which causes the cursor to be backspaced once and lowered one line. The character typed in the lower position replaces the original character in the minicomputer memory and will be transmitted when the carriage return is depressed. Since the graphics display unit is connected to a KSC timesharing terminal, other characteristics unique to that system affect the operation of the display unit. As an example, the timesharing computer counts the lines of output during its data transmission and after sufficient lines have been sent to fill the screen of the display unit, data transmission is terminated. The stop in data transmission is indicated by the ASCII code characters Λ * on the screen of the graphics unit. To receive additional data, the operator must transmit a blank line by depressing the carriage return on the keyboard.

The automatic mode of operation interacts with the specific hydrogen system simulation programs available in the Fortran subsystem of the timesharing computer. During automatic operation, the minicomputer will request a run of a specified program; send the required data when an equal sign is received; and interpret and display returning data from the timesharing computer on the graphical display unit. Usually, the returning data will be displayed

3

in graphical form. Since the hydrogen simulation programs are in the Fortran subsystem, the KSC computer must be in the Fortran subsystem before the automatic mode of operation is entered with the graphical display unit. The Fortran subsystem of the timesharing computer is indicated by an asterisk displayed on the screen.

Several control characters are used during normal operation of the graphic display unit to help the operator during the execution of the various programs. A control character is used during communication between the graphic display unit and the minicomputer and need not be followed by a carriage return to effect a transmission. A control character is executed by depressing and holding down the control key on the keyboard and then depressing the desired alpha-numeric key. Thus, a control D means that the control key was depressed and held, and then the letter D was depressed. The following is a description of the control characters available for use on the graphic display unit.

Control A: Control A allows the operator to correct a typing error before a block of data is sent to the timesharing computer. Any time before the carriage return is depressed, a change can be made to previously typed material. This change is made by depressing the control A an appropriate number of times until the cursor is located below the character to be changed, entering the new character and then proceding to enter subsequent characters in the line. One character is deleted each time control A is depressed.

Control B: Depressing control B will cause the minicomputer to issue a $*$ BRK command to the timeshare computer and return the minicomputer to the manual mode of operation. The function of the $*$ BRK command is described in the manufacturer's information manual. Control B can be used any time even during a transmission when the keyboard is locked to other input.

Control G: Control G causes the minicomputer to enter the automatic mode of operation. Entering the automatic mode of operation should not be attempted unless the KSC timeshare computer is operating in the Fortran subsystem and an asterisk (*) is displayed as the last received character on the graphic display unit.

Control P: Depressing the control P causes the minicomputer software to interpret data returning from the timesharing computer into graphical output. This option was supplied with the minicomputer to allow graphical output from any Fortran programs written in the manual mode. In order to graph the results of any program written in the manual mode, the output from the program must be supplied to the ASCII coded Fortran subroutine called PLOT currently available on the timesharing computer. Along with the data, labeling information can also be supplied to PLOT. The program DEMO currently loaded in the timesharing computer can be listed to obtain instructions on how to use subroutine PLOT. After writing a program for which a graphical output is expected the program is run in the manual mode, except that after all input data has been supplied and acknowledge received as indicated by a "beep"; control P should be depressed. A graph of the returning data will then appear on the graphical display unit.

2.3 Instructions for Log-In

The log-in routine for the minicomputer is accomplished in the manual mode. The procedure is to turn on the Modem (switch located inside the front cover), the minicomputer (key switch on front panel), and the graphics display unit (switch located on the front of the pedestal below the keyboard). The line-local switch on the graphics display keyboard should be set to line. After a short warm-up period, the screen on the graphics display unit will light up. The page key on the display unit should be depressed to prepare the screen for reception of messages. The starting address of the software program in the minicomputer is 00002 in octal (switch 14 on the top row of toggle switches up, all others down). After setting the top switches to the starting address, depress RESET and then START on the momentary contact control switches from the lower row of switches of the minicomputer. The timesharing computer can now be dialed on the telephone. After the computer carrier signal (a continuous tone) is confirmed, the telephone data switch can be actuated. As soon as the minicomputer software confirms the computer interconnections, the words PLEASE LOG IN will appear on the graphics display screen. If these words do not appear, a fault has developed in the minicomputer software, or the telephone interconnection was not achieved. The program should be reloaded as described in appendix C. The normal log-in procedure for the KSC timesharing system as described in the manufacturer's manual can now proceed. A carriage return should be supplied after each input to transmit the information to the timesharing computer. Figure 2 shows the appropriate log-in sequence as it would appear on the screen of the graphics display unit. Computer supplied messages are underlined.

2.4 Instructions for Initiation of Computation in the Automatic Mode

In order to perform calculations in the automatic mode using the hydrogen simulations programs, the Fortran subsystem of the timesharing computer must be available. On figure 2, the Fortran subsystem was entered by entering Fortran for the required system and new for the type of program. After an asterisk (*) appears on the screen as the last reception, control G can be depressed to enter the automatic mode of calculation. After initiation of the automatic mode, the universal figure (fig. 3) will appear on the screen of the graphics terminal. This figure is used to define the general characteristics of the piping system. Special procedures are required, however, for the use of the input display for the hydrogen programs. The necessity for, and the use of these special procedures are explained in Section 2.4.1.

2.4.1. Required Improvisations for the Hydrogen Input Displays

The data input displays are generated from programs loaded into the minicomputer from punched paper tape. Since the hydrogen programs require different input variables than the oxygen programs alternate input displays would be desirable; however, re-loading programs from paper tape each time the fluid is changed would be highly impractical. Equipment exists which could load the programs rapidly; however, purchase of additional equipment was not justifiable for this study. Therefore, it was necessary to improvise a method by which the required variables could be inserted into the hydrogen programs from the original oxygen displays. This improvisation was necessary for the "GENERAL INPUT DATA" option 3, and option 6, "COLD FLOW." The display which appears for option 1, "THERMAL STRESS" is unaltered and requires no unusual interpretation.

PLEASE LOG IN
$*$MD PASSWD, 26, DAC, TSS
****** CONNECT REQUEST SENT TO CP ******
KSC 635 AT CIF ON 02/06/75 AT 10.281 CHANNEL 4424

USER ID -
5ME013

PASSWORD--
R⊠XHKXⱧXꞮKⱮKⱮKꞮ
NBSH

9 BLOCKS FILE SPACE AVAILABLE

**TSS SIZE 54K CARDIN 25K

SYSTEM ?
TFOR

OLD OR NEW -
NEW

READY
*

Figure 2. Log-in sequence.

5

Figure 3 shows the "GENERAL INPUT DATA" as it will appear on the screen of the graphic display unit. Figure 3A shows the new interpretation of the numbers entered. For example, item 8 on figure 3 appears as "SUPPLY LIQUID LEVEL = 850,000 FT"; however, the hydrogen programs interpret this entry as "SUPPLY LIQUID VOLUME = 850,000 GAL". By comparison of the flow diagrams shown in figures 3 and 3A it may be seen that the pipe lengths are distributed differently in the hydrogen programs. Lengths L4 through L7 are used to represent parts of the vent line in figure 3A, whereas no vent line lengths are shown in figure 3.

In order to avoid confusion a template has been prepared which fits over the screen of the graphic display unit. The template masks the flow diagram and the wording of the oxygen display but has windows in which the entered numbers appear. The opaque portion of the template shows the new flow diagram and the appropriate wording to correspond with the hydrogen program interpretation of the entered numbers. The graphic display screen with the template in place will then appear the same as figure 3A. A similar template has been prepared for option 3 "COOLDOWN TIME", and option 6 "COLD FLOW."

2.5 Data Input

In the general input data entry 7, "SUPPLY ULLAGE PRESSURE" requires some clarification. For computation options, except option 6, there is no difference between the ullage pressure during storage and during the transfer process. For option 6, the pressure specified in the general input data is taken to be the ullage pressure during storage and it is assumed that the supply liquid becomes saturated at that pressure. The specific input data for option 6 allows a "SUPPLY ULLAGE PRESSURE DURING TRANSFER" to be selected which may be different from the supply ullage pressure during storage.

GENERAL INPUT DATA   03/14/75 8.333
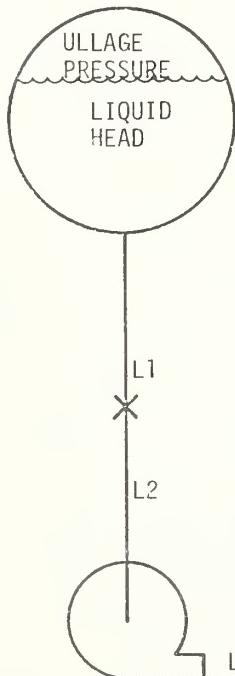
1. LENGTHS: L1 = 1606 FT
            L2 = 37 FT
            L3 = 98 FT
            L4 = 24 FT
            L5 = 22 FT
            L6 = 826 FT
            L7 = 1430 FT
            L8 = 2350 FT
            L9 = 10258 FT
2. DIA FOR LENGTHS L3, L4 = 10.482 IN
            D1 = 8.33 IN
            D2 = 10.482 IN
            D5 = 8.33 IN
            D6 = 17.50 IN
            D7 = 17.50 IN
            D8 = 17.50 IN
            D9 = 393,400 IN
3. ELEVATIONS:
            H8 = 2.9 FT
            H9 = 109 FT
4. AMBIENT TEMPERATURE = 0 DEG F
5. WIND VELOCITY = 0 KNOTS
6. RELATIVE HUMIDITY = 0%
7. SUPPLY ULLAGE PRESSURE = 1.5 PSIG
8. Supply LIQUID LEVEL = 850,000 FT
9. IS THE PIPE VACUUM INSULATED
   (0 - YES, 1 - NO) ? 1
10. DOES THE LINE VENT INTO THE TANK (1)
    OR THE CATCH BASIN (2) ? 1000
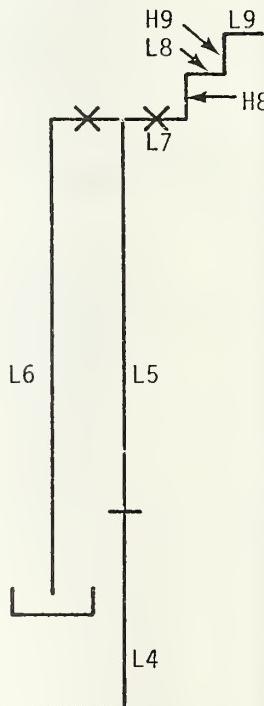
Figure 3. General input data.

6

GENERAL INPUT DATA
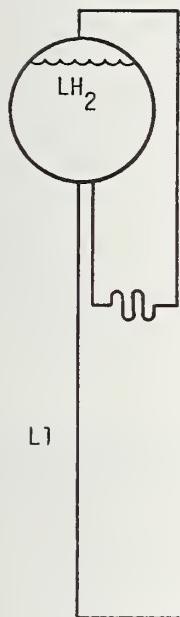
1. LENGTHS: L1 = 1606 FT
              L2 = 37 FT
              L3 = 98 FT
              L4 = 24 FT
              L5 = 22 FT
              L6 = 826 FT
              L7 = 1430 FT
              L8 = 2350 FT (EQUIV. LENGTH AT DIA. D3)
              L9 = 10258 FT (EQUIV. LENGTH AT DIA. D6)
2. DIA FOR LENGTHS L1   = 10.482 IN
              D2 = 8.33 IN
              D3 = 10.482 IN
              D4 = 8.33 IN
              D5 = 17.50 IN
              D6 = 17.50 IN
              D7 = 10258 IN

3. CAP. RECVR. TNK = 393,400   GALLONS
4. VENT RATE = 2.9 LBM/SEC
5. ELEV. H1 = 109 FT
6. PUMP RATED FLOWRATE = 0 GPM
   PUMP RATED P. = 0 PSI
   PUMP RATED SPEED = 0 RPM
7. SUPPLY ULLAGE PRESSURE = 1.5 PSIG
8. SUPPLY LIQUID VOLUME 1   850,000 GAL.
9. INSULATION ON L1-L3 (0-VACUUM, 1-FOAM,
   2-BARE)   1
10. ESTIMATED HEAT LEAK DUE
    TO COUPLINGS   1000 BTU/HR
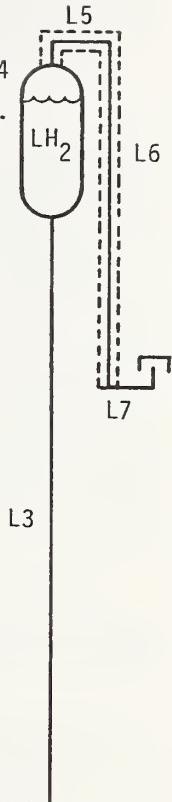
Figure 3A. Hydrogen general input data.

It will be noted that in figure 3A there are two lengths, L8 and L9, which are listed but which are not shown in the schematic flow diagram. L8 is an equivalent length of pipe of diameter D3 to represent pressure losses due to valves, fittings, flex hose, filters, etc. in addition to the actual lengths L1 through L3 in the fill line. L9 is a similar equivalent length of pipe of diameter D6 to represent additional pressure losses in the vent line.

Since the flow in the fill line is considered incompressible a standard method of determining the equivalent length as given by most manufacturers of valves and fittings may be used. When the pressure drop element is located in a pipe having a diameter other than D3 the following equation may be used:

$$L8 = L_p (D3/D_p)^4,$$

where L_p is the equivalent length as given by the manufacturer and D_p is the diameter of the pipe in which the valve or fitting is installed.

In the vent line variations in gas density must be considered as well as changes in diameter when assigning a value to equivalent length L9. This density change is due to changes in absolute temperature to a much greater extent than to changes in absolute pressure. Since the pressure drop for a given mass flow rate is inversely proportional to

7

density and density is approximately inversely proportional to the absolute temperature:

$$L9 = L_p(T_p/T_6)(D6/D_p)^4,$$

where T_p is the temperature at the location of the pressure drop element and T_6 is the temperature at the discharge end of length L6. These temperatures may be estimated by assuming a linear variation of temperature along the vent line, a vent inlet temperature of approximately 20 K (36°R) and a vent discharge (bubble cap) temperature obtained from a preliminary run of computer option 6.

When the input figures appear, the input variables will contain the numbers used in the previous run of the program. The first time the hydrogen programs are used following operation of the oxygen programs most of the hydrogen data will have to be re-entered since the data in the minicomputer memory will be oxygen rather than hydrogen data. The reverse situation will exist when oxygen programs are first used following operation of the hydrogen programs; i.e., most of the oxygen data will have to be re-entered.

On succeeding runs with the same fluid any or all input numbers may be changed. A change is accomplished by moving the horizontal cursor to the line containing the number to be changed, pressing the "RUB OUT" key, then typing the new number in the blank space which will appear. After pressing "RETURN" the operator may move the cursor and make further changes. Even though the schematic will not change, the computer programs will accept zero for lengths 2 and 3 (L2, L3) to eliminate the vertical rise if desired and will accept a single pipe length equal to the total pipe length and a single diameter. At the upper right on the figure, the current date and time will appear. This date and time will remain the same and will appear on all subsequent figures to be used as an identification number to correlate hardcopy output. After all input parameters have been adjusted to acceptable values, and the ALT MODE key is depressed, the system will proceed to the next page.

2.6 Selection of Computation Option

This page (fig. 4) allows a choice of the computer program to be run with the previous input data. (As was noted earlier, options 2, 4, and 5 are not available for the hydrogen system). After this choice is made by placing the option number in the appropriate blank

SELECTION OF COMPUTATION OPTIONS   Ø3/Ø7/75   9.618

SELECT ONE OF THE FOLLOWING COMPUTATION OPTIONS:

1.   OPTION 1 - THERMAL STRESSES. STRESSES DUE TO RAPID COOLDOWN OF FLANGES,
     OR BOWING OF PIPELINE DUE TO STRATIFICATION IN THE CASE OF LOW FLOW RATES.

2.   OPTION 2 - VALVE OPENING SURGES. SURGES DUE TO RAPID VAPORIZATION WHEN
     A VALVE IS OPENED PRECEDING A FREE WHEELING PUMP. ALSO CALCULATED IS THE
     PRESSURE PEAK DUE TO WATER HAMMER AS THE LIQUID IMPINGES ON A FREE WHEELING
     PUMP.

3.   OPTION 3 - COOLDOWN TIME. CALCULATES LENGTH COOLED DOWN, FLOW RATE, AND
     PRESSURE DROP ACROSS THE PUMP VERSUS TIME.

4.   OPTION 4 - PUMP START UP COOLDOWN SURGES. CALCULATES SURGES DUE TO RAPID
     VAPORIZATION WHEN A PUMP IS STARTED UPSTREAM FROM A WARM LINE.

5.   OPTION 5 - WATER HAMMER. PRESSURE SPIKES DUE TO WATER HAMMER WHEN VALVES
     ARE CLOSED IN A FLOWING LIQUID STREAM.

6.   OPTION 6 - COLD FLOW. STEADY FLOW OPERATION AND TRANSIENT RESPONSE TO
     CHANGES IN OPERATING CONDITIONS.

7.   OPTION 7 - RETURN TO MONITOR.

              OPTION SELECTED IS 1

Figure 4. Selection of computation options.

and depressing ALT MODE, the terminal will display the first page of that option. The first page of each option, plus as many as two more pages will appear, allowing for more specialized input data. Typical display figures are shown in the following sections. After the input data has been adjusted as previously described and ALT MODE depressed for each input figure, the output of each option will appear after a short period of time. During this time interval, several "beeps" will be heard as input data is supplied to the timesharing computer. In some instances, when multiple output is expected, a choice of output curves will be made available. Each output curve will fill the entire screen. When the output curve appears, it will be possible to digitize any point on the curve by placing the vertical cursor on the desired point and depressing the space bar, and a hard copy may be obtained by depressing control D.

Restarting with the input display is accomplished by depressing ALT MODE. At this time the operator may choose another computation option with the previous input values, he may change the input, or he may terminate computation by selecting option 7 from the second page (RETURN TO MONITOR). Of course, if the operator chooses to start calculations on a new system, a new date and time will appear on all figures, allowing him to maintain correlation between the input and the output figures.

2.7 Reloading the Minicomputer Programs

Several paper tapes have been supplied with the system. Some of the tapes were supplied by the manufacturer of the minicomputer and can be used to debug the hardwired functions of the minicomputer. The function of the manufacturer's supplied tapes are described in accompanying literature. Other paper tapes can be used to reload the existing minicomputer program. The paper tape loading procedure using an appropriate teletype unit, is described in Appendix C.

3. Computation Options

3.1 Option 1 - Thermal Stresses

Calculates stresses due to rapid cooldown of flanges, or bowing of pipeline due to stratification in the case of low flow rates.

3.1.1 Application

This computation determines low and high limits of flow rates during cooldown from the standpoint of the resulting stresses in the piping system and flanged joints. For very high flow rates and rapid cooling excessive thermal stresses may be created in flanges due to the large radial temperature gradients. On the other hand very low flow rates might result in stratified flow with liquid lying along the bottom of the pipe. The resulting circumferential temperature gradients could cause a pipeline to bow signi-ficantly. These stress-limited cooldown flow rates are calculated according to the method of Novak [1970].

3.1.2 Input Data Entries

Section 2.3 describes the general log-in procedure for the graphic display system. After the initial log-in has been accomplished, and option 1 has been selected, a display similar to figure 5 appears. The input required for this option in addition to the general

Ø3/Ø7/75   9.618

OPTION 1 - THERMAL STRESSES

1.   OUTSIDE DIAMETER OF PIPE FLANGE IS 18 IN

2.   OUTSIDE DIAMETER OF PIPELINE IS 14 IN

3.   INSIDE DIAMETER OF PIPELINE IS 1Ø.482 IN

4.   PIPELINE MATERIAL IS NUMBER 2
     CHOICE OF PIPELINE MATERIAL:
     1 ALUMINUM
     2 3Ø4 STAINLESS STEEL

Figure 5. Option 1 - thermal stresses input display.

9

input data of figure 3 is shown in figure 5. These are the outside diameter of the pipe flange, the outside and inside diameters of the pipeline and the material of the pipeline.

3.1.3 Output

The output for this calculation is alpha numeric only but will be displayed on the screen just as other output data. The values given will be the maximum cooldown flow rate which will allow the stress in the flanges to remain below the yield point, and the minimum flow rate which will prevent stratified flow from occurring with the given input conditions.

3.2 Option 3 - Cooldown Time - length cooled down and flow rate versus time.

3.2.1 Application

As a cryogenic liquid flows or is pumped from a reservoir into a warm pipeline, vapor forms at the leading end of the liquid stream. Frictional resistance to the flow of this vapor is the principle limiting factor in the rate of cooling pipelines of large length-to-diameter ratios. The slow moving liquid is evaporated and vapor is warmed to near the initial temperature of the pipe in a short distance relative to the length of pipe. When the pipeline is uninsulated, the heat transfer to the cold part of the pipe adds to the vaporization rate and thus further retards the progress of the liquid. The cooldown model based on this cold front concept and listing of the computer subroutine (CDT) are discussed in Supplement A (1974). The heat-mass transfer correlations are discussed in Appendix A of NBSIR 74-366 (Voth, et al. 1974).

3.2.2 Input Data Entries

Section 2.3 describes the log-in procedure for the graphic display system. After the initial log-in has been accomplished and option 3 "Cooldown Time" has been selected, a display similar to Figure 6 appears. As discussed in section 2.4 this display is a part of the minicomputer program designed for the oxygen system. It is apparent from Figure 6 that the input display accommodates six different pipe sections, three wall materials and three thicknesses. Since it was necessary to limit the number of hydrogen fill line sizes to three (L1, L2, and L3), the three extra material and thickness variables had to be eliminated. Figure 6A shows the resulting interpretation of the hydrogen input data for the cooldown time program. It can be seen that entries 3 through 8 remain unchanged.

If desired, input variables pertinent to the cooldown time computation may be viewed and changed on this display as explained in Section 2.4. The variables in figure 6A apply only to option 3 and are in addition to those of the general input data of figure 3. Concentrated masses such as valves, pumps, and fittings should be compensated for by specifying additional pipe wall thickness provided the calculated cooldown time desired is to include the time needed to completely cool these concentrated masses.

3.2.3 Output

The outputs of the computation are: (1) length cooled down versus time, (2) flow rate of liquid hydrogen versus time, and (3) pressure drop across the pump (if a pump exists) versus time. Typical examples are shown in figures 7 and 8. The x and y values shown in figure 7 and subsequent output graphs are the result of digitizing. In figure 7 x corresponds to time and y corresponds to length cooled.

3.3 Option 6 - Cold Flow - steady flow operation and transient response to changes in operating conditions.

3.3.1 Application

This computation applies after the transfer line has reached operating temperature. It deals with response to changes in operating conditions but does not deal with cooldown transients. The latter are treated separately in option 3. The flow rate and receiver tank liquid temperature (or two phase quality) are calculated as functions of the supply ullage pressure and pipe geometry. The accumulated liquid, change in supply liquid level, and vent bubble cap temperature are also computed. Supply ullage pressure and valve settings are allowed to vary with time. Details of the computation and computer program listing are given in Supplement A (1974), and Appendix D of this report.

PIPE WALL DATA: MATERIALS - ENTER   FOR
                                        1   STAINLESS STEEL
                                        2   ALUMINUM
                                        3   INVAR

    1.   MATERIAL OF PIPE FOR LENGTHS
         L1, L2, L3, L4 IS 3
             FOR L5 IS 3
             FOR L6 IS 3
             FOR L7 IS Ø
             FOR L8 IS Ø
             FOR L9 IS Ø
    2.   WALL THICKNESS FOR LENGTHS
         L1, L2, L3, L4 IS .134 IN
             FOR L5 IS .134 IN
             FOR L6 IS .134 IN
             FOR L7 IS Ø IN
             FOR L8 IS Ø IN
             FOR L9 IS Ø IN
    3.   LENGTH OF LINE TO BE COOLED IS 4Ø9Ø FT
    4.   IS A PUMP PRESENT IN THE SYSTEM
         (Ø - NO, 1 - YES)? Ø
    5.   IF THERE IS A PUMP, DOES IT FREEWHEEL
         DURING COOLDOWN (Ø) OR IS IT STARTED
         AFTER A SPECIFIED TIME (1)? 1
    6.   IF THE PUMP IS STARTED, HOW LONG AFTER
         COOLDOWN IS IT STARTED?   35 MIN
    7.   IF THE PUMP IS STARTED, AT WHAT SPEED
         DOES IT RUN? 1ØØØ RPM
    8.   OUTPUT DESIRED IS 1
         (1) LENGTH COOLED DOWN VS. TIME
         (2) FLOW RATE OF LOX VS. TIME
         (3) PRESSURE DROP ACROSS PUMP VS. TIME

               Figure 6. Option 3 - cooldown time input display.
------------------   ------------------------
                        OPTION 3 - COOLDOWN TIME

PIPE WALL DATA: MATERIALS - ENTER   FOR
                                        1   STAINLESS STEEL
                                        2   ALUMINUM
                                        3   INVAR

    1.   MATERIAL OF PIPE FOR LENGTHS
             L1 IS 3
             L2 IS 3
             L3 IS 3
    2.   WALL THICKNESS FOR LENGTHS
             L1 IS .134 IN
             L2 IS .134 IN
             L3 IS .134 IN
    3.   LENGTH OF LINE TO BE COOLED IS 4Ø9Ø FT
    4.   IS A PUMP PRESENT IN THE SYSTEM
         (Ø - NO, 1 - YES)? Ø
    5.   IF THERE IS A PUMP, DOES IT FREEWHEEL
         DURING COOLDOWN (Ø) OR IS IT STARTED
         AFTER A SPECIFIED TIME (1)? 1
    6.   IF THE PUMP IS STARTED, HOW LONG AFTER
         COOLDOWN IS IT STARTED?   35 MIN
    7.   IF THE PUMP IS STARTED, AT WHAT SPEED
         DOES IT RUN? 1ØØØ RPM
    8.   OUTPUT DESIRED IS 1
         (1) LENGTH COOLED DOWN VS. TIME
         (2) FLOW RATE OF LOX VS. TIME
         (3) PRESSURE DROP ACROSS PUMP VS. TIME

Figure 6A. Option 3 - cooldown time hydrogen input display.

LIQUID IS DRIVEN BY ULLAGE PRESSURE AND STATIC HEAD
THERE IS NO PUMP IN THE SYSTEM

X = 3.32E+00   Y = 1.76E+03
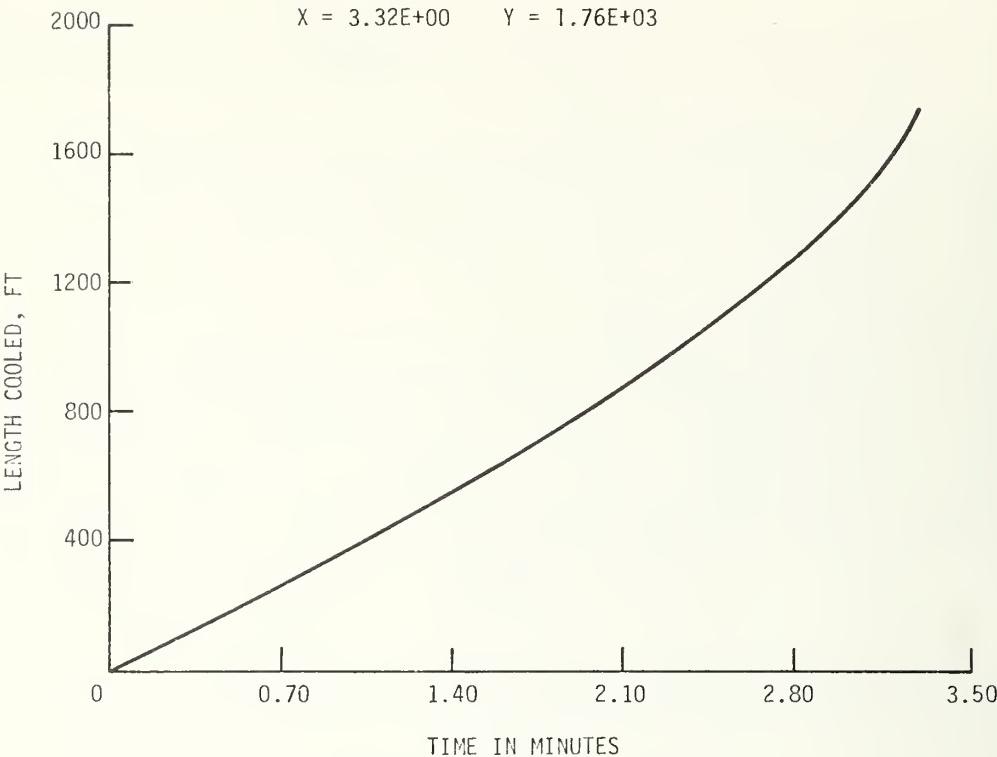
Figure 7.   Option 3 – output.

LIQUID IS DRIVEN BY ULLAGE PRESSURE AND STATIC HEAD
THERE IS NO PUMP IN THE SYSTEM
TOTAL LIQUID INFLOW   4695 LBS, TOTAL VENT   521 LBS

X = 3.32E+00,   Y = 7.43E+03
X = 3.51E+00,   Y = 1.66E+04
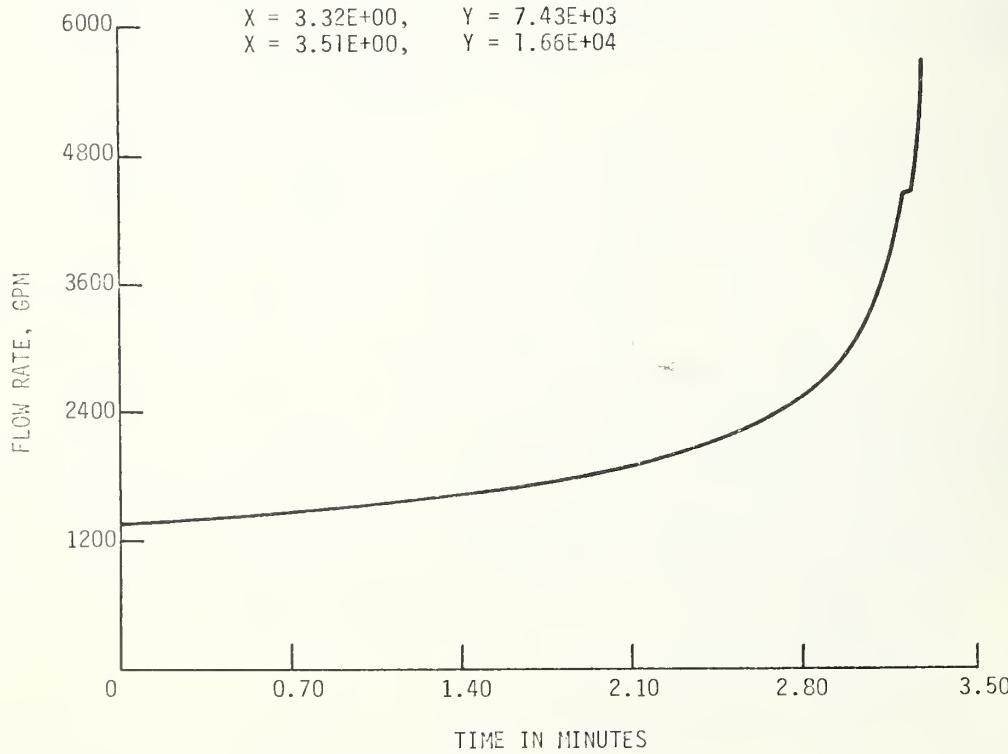
Figure 8.   Option 3 – output (continued).

12

3.3.2 Input Data Entries

Section 2.3 describes the general log-in procedure for the graphic display system. After the option 6 is selected, a display similar to figure 9 and 10 will appear. Figure 9, as with all the input data displays, is contained in the minicomputer memory and was designed for the oxygen system. Several changes were desired for the hydrogen programs:

1. Under item 3, the output options "RECEIVER LIQUID TEMPERATURE" to replace "PUMP DISCHARGE PRESSURE" as output option 3.

2. "BUBBLE CAP TEMPERATURE" to replace "LINE PRESSURE AHEAD OF DISCHARGE VALVE" as output option 4.

3. Under item 4, the schedule of changes in operating conditions, the variable "PUMP RPM" is to be replaced by "SUPPLY ULLAGE PRESSURE".

Figure 9A incorporates these changes and illustrates the way in which the hydrogen programs interpret the input data entries. A template has been prepared which, when placed over the screen of the graphic display unit, shows the correct meanings of the input display entries with respect to the hydrogen version of "COLD FLOW."

If desired, input variables may be examined and changed in the display by the procedure explained in Section 2.4 except in the table of numbers showing time, valve opening, and pump speed, where the vertical and horizontal cursors must be positioned before depressing the space bar.

Entry 1 allows a supply ullage pressure during transfer to be selected which may or may not be different from the ullage pressure during storage. (The storage pressure is taken as that pressure which was selected previously under General Input Data.) Entry 1 along with entry 2 relates to the subcooling of the inlet liquid. This subcooling enters into the calculation of discharge liquid temperature, or fraction of vapor being discharged. Entry 4 allows for the selection of a schedule of changes in operating conditions. That is, the supply ullage pressure or the discharge valve setting may be specified at six times. Supply ullage pressure and valve setting change linearly from one specified time to the next. The program carries out the computation to ten seconds beyond the last entry in the schedule.

The third entry under Cold Flow allows the selection of computed quantities to be displayed. The desired quantities are selected as numbers 1 through 6. Striking ALT MODE initiates the calculation, and the next display is the selected output graph.

3.3.3 Output

Typical output graphs are shown in figures 11 through 16. The following variables may be plotted as functions of time:

Fig. 11 Flow rate

Fig. 12 Total accumulated liquid discharged into the receiver after subtracting off the quantity vaporized

Fig. 13 Receiver liquid temperature

Fig. 14 Bubble cap temperature

Fig. 15 Final vapor fraction

Fig. 16 Remaining liquid volume.

STEADY OPERATION AND TRANSIENT RESPONSE TO CHANGE IN OPERATING CONDITIONS

1.   SUPPLY ULLAGE PRESSURE DURING TRANSFER IS 1.5 PSIG
      (SUPPLY ULLAGE PRESSURE DURING STORAGE WAS SELECTED PREVIOUSLY)

2.   INLET LIQUID WILL BE SATURATED AT CONDITION 1
      1 - SATURATED AT STORAGE PRESSURE
      2 - SATURATED AT TRANSFER PRESSURE

3.   THE OUTPUT, FROM AMONG THE FOLLOWING, TO BE GRAPHED IS 1
      1 - FLOW RATE VERSUS TIME
      2 - TOTAL LIQUID DISCHARGED FROM THE PIPELINE VERSUS TIME
      3 - PUMP DISCHARGE PRESSURE VERSUS TIME
      4 - LINE PRESSURE AHEAD OF THE DISCHARGE VALVE VERSUS TIME
      5 - OUTLET QUALITY VERSUS TIME
      6 - FLUID DISCHARGE TEMPERATURE VERSUS TIME

4.   THE SCHEDULE OF CHANGES IN OPERATING CONDITIONS:

TIME, MINUTES	DISCHARGE VALVE FRACTION OPEN	PUMP RPM
∅	∅.∅∅4	1.5
16	∅.∅∅4	1.5
27	∅.∅15	1.5
3∅	∅.∅15	1.5
32	1.∅∅∅	77.5
65	1.∅∅∅	77.5

Figure 9. Option 6 - cold flow input display.

STEADY OPERATION AND TRANSIENT RESPONSE TO CHANGE IN OPERATING CONDITIONS

1.   SUPPLY ULLAGE PRESSURE DURING TRANSFER IS 1.5 PSIG
      (SUPPLY ULLAGE PRESSURE DURING STORAGE WAS SELECTED PREVIOUSLY)

2.   INLET LIQUID WILL BE SATURATED AT CONDITION 1
      1 - SATURATED AT STORAGE PRESSURE
      2 - SATURATED AT TRANSFER PRESSURE

3.   THE OUTPUT, FROM AMONG THE FOLLOWING, TO BE GRAPHED IS 1
      1 - FLOW RATE VERSUS TIME
      2 - TOTAL LIQUID DISCHARGED FROM THE PIPELINE VERSUS TIME
      3 - RECEIVER LIQUID TEMPERATURE
      4 - BUBBLE CAP TEMPERATURE
      5 - OUTLET QUALITY VERSUS TIME
      6 - REMAINING LIQUID VOLUME VERSUS TIME

4.   THE SCHEDULE OF CHANGES IN OPERATING CONDITIONS:

TIME, MINUTES	DISCHARGE VALVE FRACTION OPEN	TRANSFER PRESSURE PSIG
∅	∅.∅∅4	1.5
16	∅.∅∅4	1.5
27	∅.∅15	1.5
3∅	∅.∅15	1.5
32	1.∅∅∅	77.5
65	1.∅∅∅	77.5

Figure 9A. Option 6 - cold flow hydrogen input display.

1 EQUAL PERCENTAGE
(PARABOLIC)

2 LINEAR

3 QUICK OPENING
(SQUARE ROOT)

PERCENT OF TOTAL STEM TRAVEL

0   100

PERCENT OF FULL FLOW
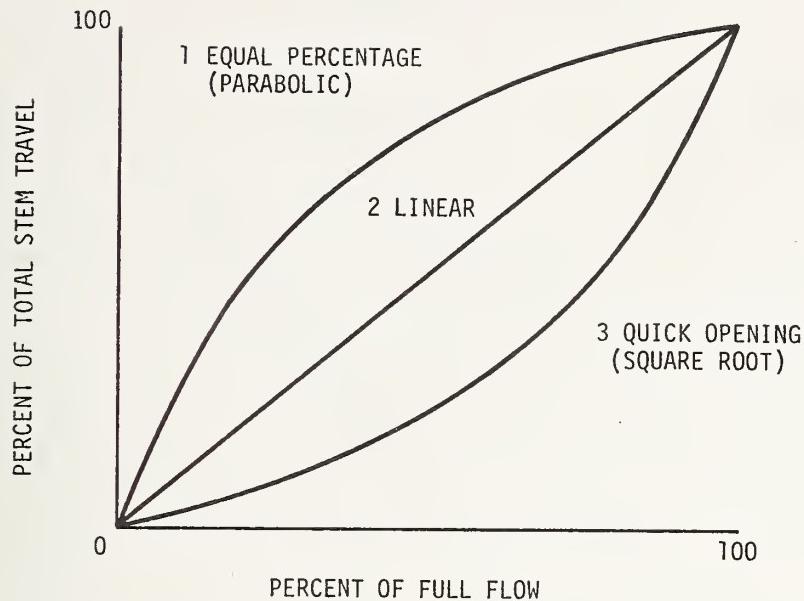
CHOOSE VALVE CHARACTERISTIC (1, 2, OR 3) _3_

Figure 10. Option 6 – cold flow input display (continued).

03/31/75 9.884

STEADY OPERATION AND TRANSIENT RESPONSE
TO CHANGES IN OPERATING CONDITIONS
DISCHARGE TEMP AT A FLOW OF 12997 GPM WAS 36 R

X = 3.24E+01,   Y = 1.30E+04
X = 6.52E+01,   Y = 1.24E+04
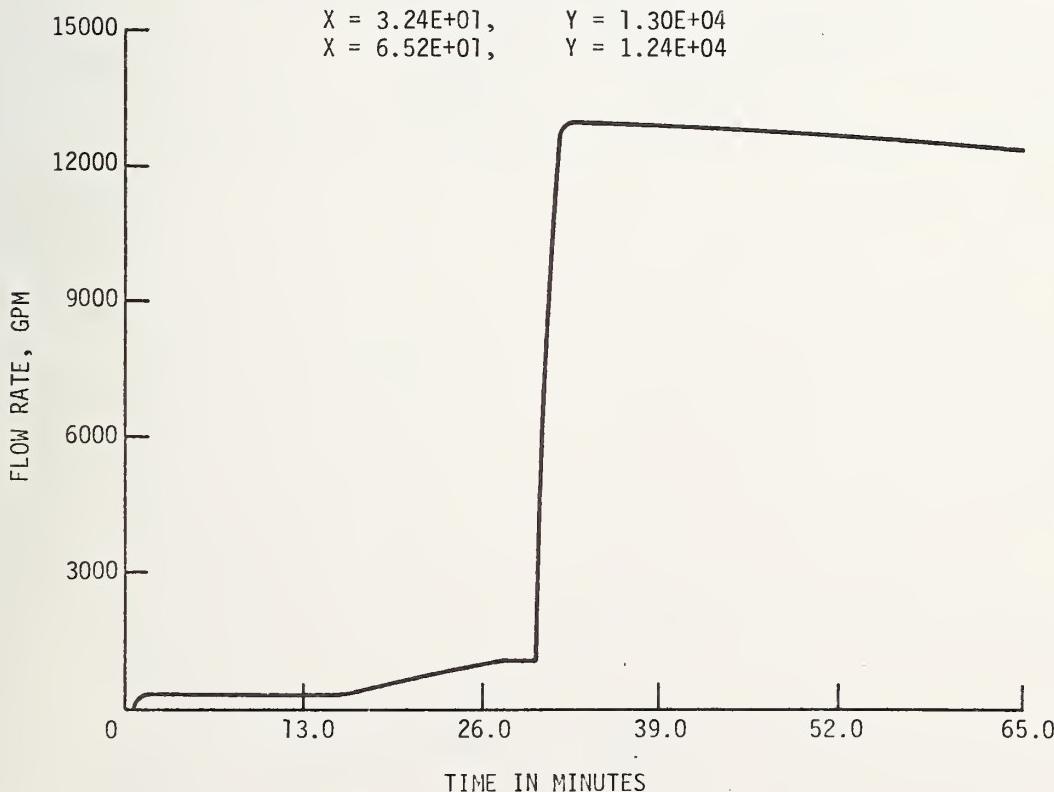
Figure 11. Option 6 – output.

15

STEADY OPERATION AND TRANSIENT RESPONSE
TO CHANGES IN OPERATING CONDITIONS

X = 3.03E+01,   Y = 1.68E+04
X = 3.90E+01,   Y = 1.27E+05

TIME IN MINUTES
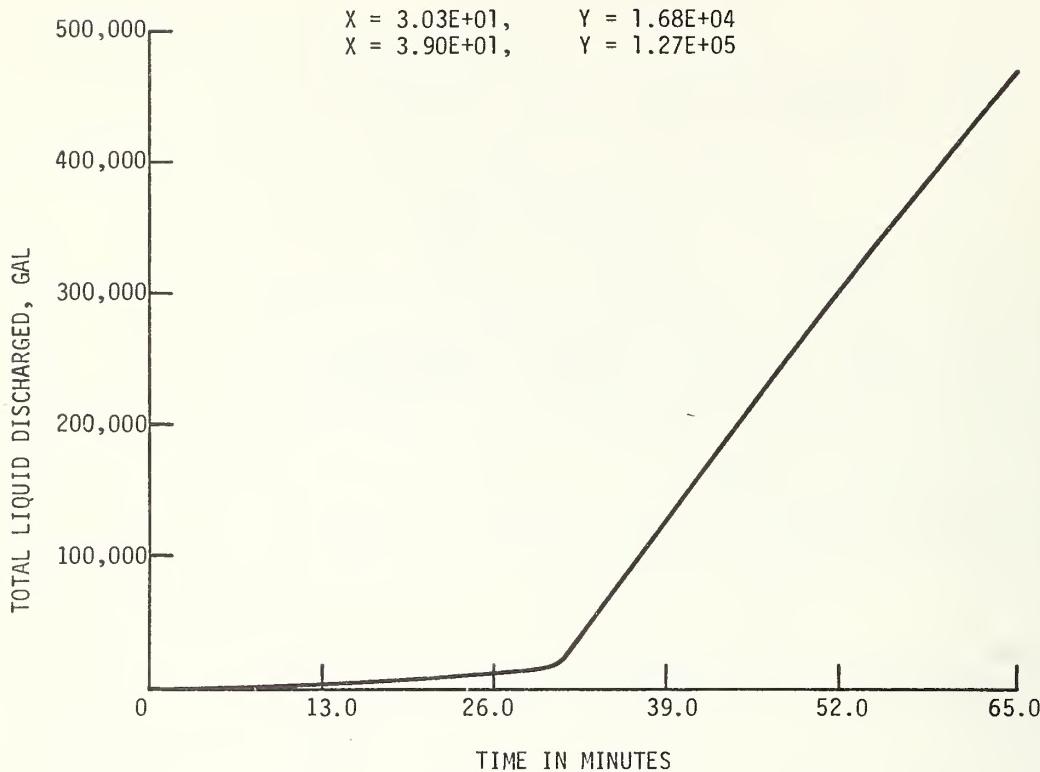
Figure 12.   Option 6 - output (continued).

03/31/75   8.699

STEADY OPERATION AND TRANSIENT RESPONSE
TO CHANGES IN OPERATING CONDITIONS

X = 7.31E-01,   Y = 3.65E+01
X = 6.52E+01,   Y = 3.65E+01

TIME IN MINUTES
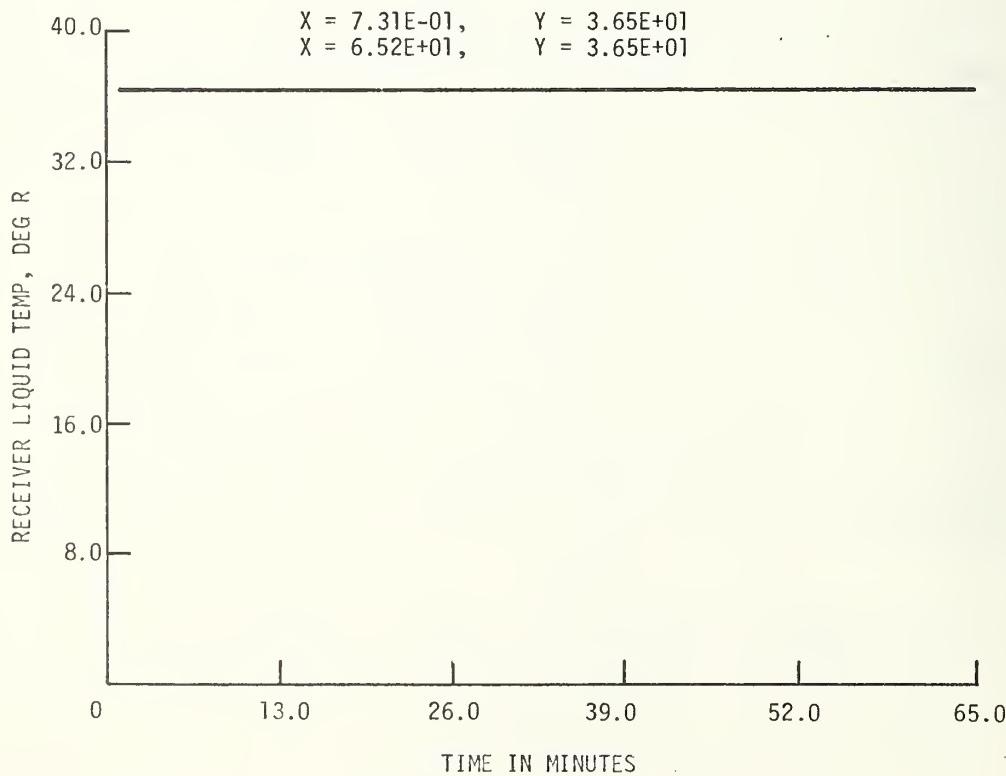
Figure 13.   Option 6 - output (continued).

16

STEADY OPERATION AND TRANSIENT RESPONSE
TO CHANGES IN OPERATING CONDITIONS

X = 8.12E-01,   Y = 2.20E+02
X = 1.22E+00,   Y = 2.18E+02
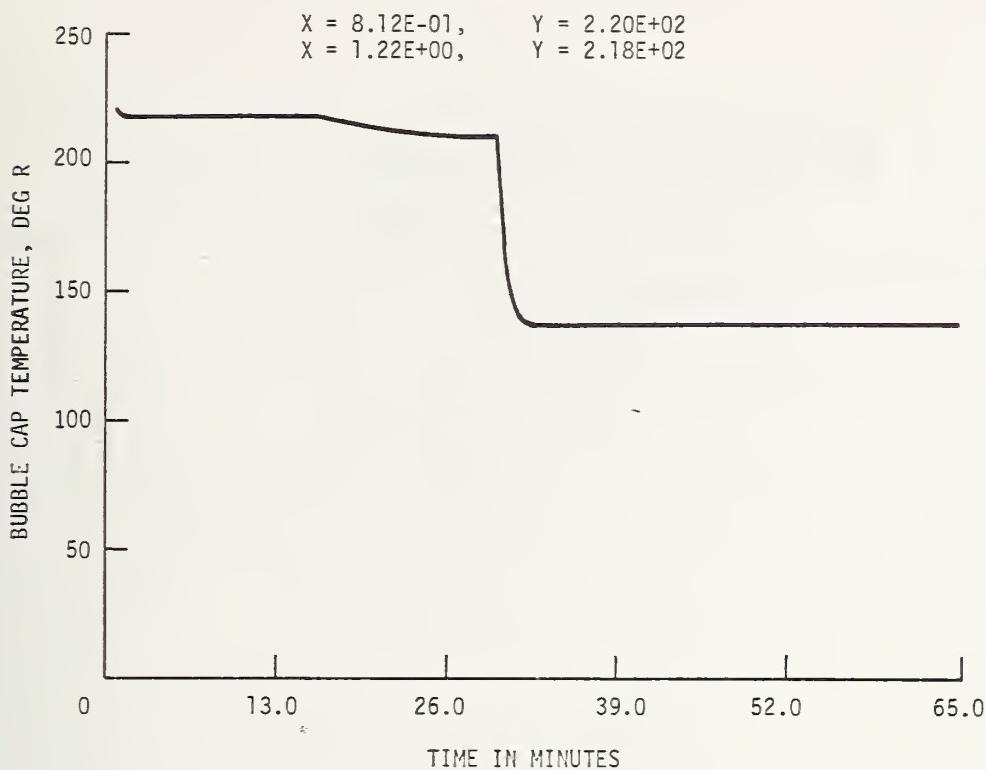
Figure 14. Option 6 - output (continued).

STEADY OPERATION AND TRANSIENT RESPONSE
TO CHANGES IN OPERATING CONDITIONS

X = 8.12E-01,   Y = 2.41E-02
X = 1.14E+00,   Y = 8.04E-03
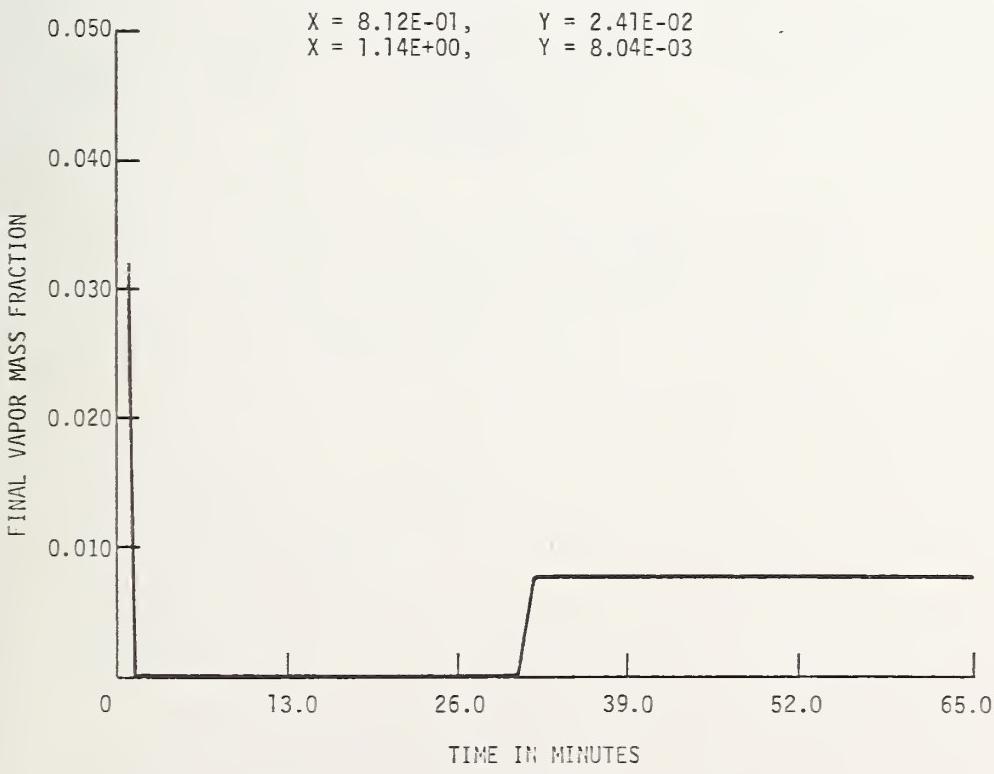
Figure 15. Option 6 - output (continued).

17

STEADY OPERATION AND TRANSIENT RESPONSE
TO CHANGES IN OPERATING CONDITIONS

X = 1.30E+01,   Y = 8.46E+05
X = 2.60E+01,   Y = 8.39E+05
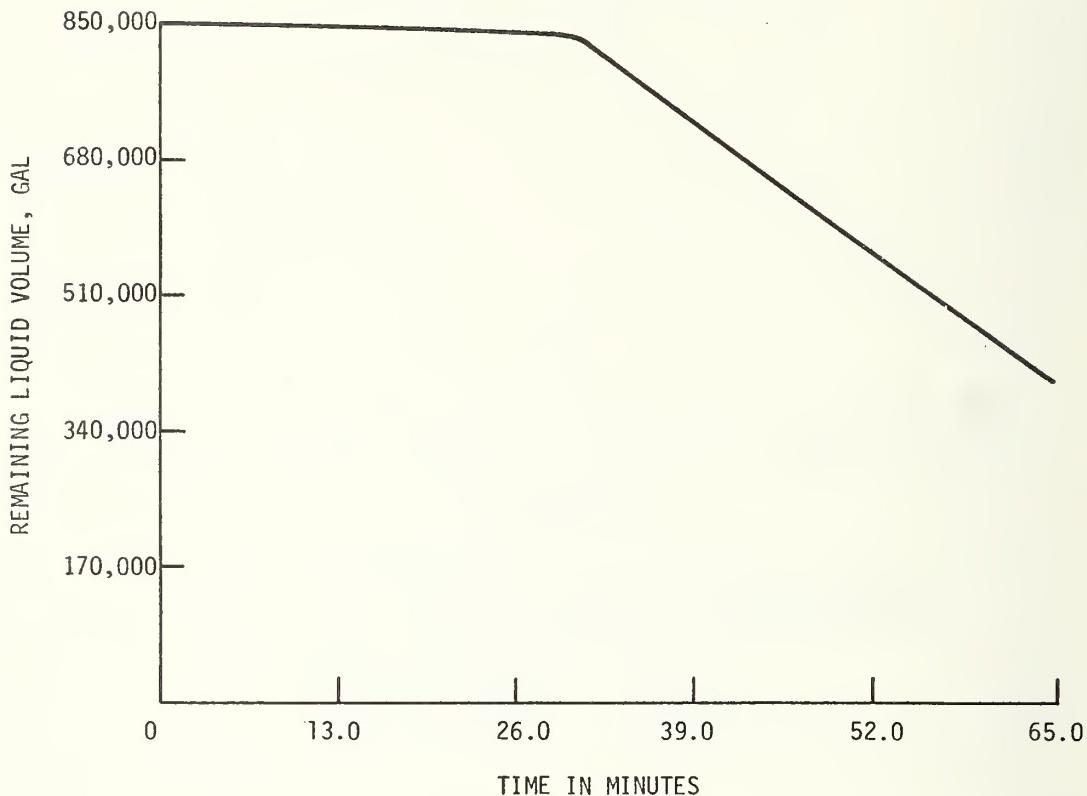
Figure 16.   Option 6 – output (continued).

4. Nomenclature

D = diameter.

D_e = external diameter of vent line.

D_i = internal diameter of vent line.

$d\ell$ = differential length of vent line.

dQ = heat flux to the hydrogen vent line in the length $d\ell$.

$f_{T\ell}$ = Fanning friction factor calculated as though the total flow were liquid.

f_{tv} = Fanning friction factor calculated as though the total flow were vapor.

G_ℓ = liquid mass flow rate per unit cross sectional area.

G_{tp} = two phase mass flow rate per unit cross sectional area.

h_e = heat transfer coefficient between the outside of the vent line and the atmosphere.

h_i = heat transfer coefficient between the inside of the vent line and the vent gas.

h_1 = average heat transfer coefficient for the double walled section of the vent line.

h_2 = average heat transfer coefficient for the single walled section of the vent line.

k = heat transfer factor as defined by equation A_6.

k_1 = k for the double walled section of the vent line.

k_2 = k for the single walled section of the vent line.

L_1 = length of the double walled section of the vent line.

L_2 = length of the single walled section of the vent line.

$\dot{m}$ = mass flow rate.

p = absolute pressure.

$(\Delta P/\Delta x)_\ell$ = liquid pressure drop per unit length in the fill line.

$(\Delta P/\Delta x)_{tp}$ = two phase pressure drop per unit length in the fill line.

R_G = ratio of two phase to liquid flow rates.

R_{GL} = value of R_G at the discharge end of the fill line.

T = absolute temperature.

T_a = ambient absolute temperature.

T_{in} = absolute temperature at the inlet of a section of vent line.

T_{out} = absolute temperature at the outlet of a section of vent line.

T_w = pipe wall absolute temperature.

Y = Quality, mass of vapor divided by total mass of the mixture.

β = two phase flow properties parameter as defined by equation B4.

θ = two phase pressure drop parameter.

μ_ℓ = liquid absolute viscosity.

μ_v = vapor absolute viscosity.

ρ_ℓ = liquid density.

ρ_v = vapor density.

5. References

Boeing Company, Vehicle Vent Subsystem, Liquid Hydrogen Subsystem Launch Complex 39A
    NASA P/N 75M05753, Test Report TR-520-D, Boeing Company (March 1, 1967).

Martinelli, R. C., and Nelson, D. B., Prediction of pressure drop during forced circulation
    boiling of water, ASME Transactions, 70, pp. 695-716 (1948).

Novak, J. K., Cooldown flow rate limits imposed by thermal stresses in liquid hydrogen or
    nitrogen pipelines, Advances in Cryogenic Engineering, 15, Ed. K. D. Timmerhaus,
    pp. 346-353, (Plenum Press, New York, N.Y., 1970).

Supplement A. Oxygen Loading Simulation Computer Programs (1974). Available on request.

Voth, R. O., Steward, W. G., and Hall, W. J., Study of Cryogenic Propellant Systems for
    Loading the Space Shuttle, Nat. Bur. Stand. (U.S.) NBSIR 74-366 (April 1974).

APPENDIX A

Vent Gas Temperature

The heat flux from the atmosphere to a differential length, $d\ell$, of a cryogenic ventline is

$$dQ = h_e (T_a - T_w) \pi D_e d\ell \ . \tag{A1}$$

The heat flux from the wall to the vent gas, assuming no temperature gradient through the wall, is

$$dQ = h_i (T_w - T) \pi D_i d\ell \ . \tag{A2}$$

(Symbols are defined in the nomenclature of this report.)

The vent gas temperature rise due to dQ, neglecting axial heat conduction, is

$$dT = \frac{1}{\dot{m} c_p} \ dQ. \tag{A3}$$

Elimination of dQ and T_w from equations (A1), (A2), and (A3) yields,

$$\frac{dT}{T_a - T} = \frac{\pi h_e D_e d\ell}{\dot{m} c_p \left(\dfrac{h_e D_e}{h_i D_i} + 1 \right)} \tag{A4}$$

If h_e and h_i are taken to be constant average values over the length L, integration of (A4) yields,

$$T_a - T_{out} = (T_a - T_{in}) \exp (-k \frac{D_e L}{\dot{m}}) \tag{A5}$$

where

$$k = \frac{\pi h_e}{\dot{m} c_p \left(\dfrac{h_e D_e}{h_i D_i} + 1 \right)} \ . \tag{A6}$$

In the calculation of vent line temperature it is assumed that the heat transfer from the environment to the vent line will have two characteristic coefficients. For the double walled length, L_1, of the vent line starting at the vehicle $h = h_1$ and $k = k_1$; for the uninsulated length, L_2, extending from the end of L_1 to the burn pond, $h = h_2$ and $k = k_2$. Then, from (A5),

$$T_a - T_1 = (T_a - T_o) \exp (\frac{-k_1 D_1 L_1}{\dot{m}}), \tag{A6}$$

and

$$T_a - T_2 = (T_a - T_1) \exp (\frac{-k_2 D_2 L_2}{\dot{m}}). \tag{A7}$$

T_o = Temperature at vehicle tank

T_1 = Temperature at the connection of L_1 and L_2

T_2 - Bubble cap temperature.

21

The exponents k_1 and k_2 were evaluated from the following experimental data (Boeing Company [1967], Fig. 4-5):

T_o = 75 K (135°R)

T_1 = 84.4 K (152°R)

L_1 = 281 m (923 ft.)

D_1 = 43.8 cm (17.25 in.)

T_2 = 144 K (260°R)

L_2 = 344 m (1130 ft)

D_2 = 43.8 cm (17.25 in)

T_a = 300 K (540°R)

$\dot{m}$ = 1211 g/s (2.67 lb/s)

k_1 = 1.475 $(10)^{-5}$

k_2 = 4.468 $(10)^{-5}$.

Constant k_1, k_2 are used with equations (A6) and (A7) to compute the vent gas discharge temperature (bubble cap temperature).

22

Two Phase Flow

In computation option 6, "COLD FLOW", heat leak into the liquid and pressure drop along the fill line can result in vapor formation and two phase flow. The presence of even a small fraction of vapor in the fluid stream can cause a significant increase in the friction pressure drop for a given mass flow rate. The correlation of Martinelli and Nelson [1948] has been used to predict two phase flow pressure drop with good results for all cryogenic fluids. An adaptation of that correlation has been used in this study to predict the effect of the presence of vapor on liquid hydrogen flow rates. The modified form of the Martinelli-Nelson correlation, given in equation B1, has the advantage of reducing properly to the usual single phase expression for liquid or gas.

$$\left(\frac{\Delta P}{\Delta X}\right)_{tp} = \theta \left[\frac{f_{tv} \; Y^{1.8}}{\rho_v} + \frac{f_{t\ell} \; (1-Y)^{1.8}}{\rho_\ell}\right] \frac{G_{tp}^2}{2D} \; , \tag{B1}$$

where the symbols are defined in the nomenclature of this paper. The two phase flow factor, θ is a function of liquid and vapor properties and quality (mass fraction of vapor),

$$\theta = \theta(\beta)$$

$$\beta = \frac{1}{1 + \left(\frac{\mu_\ell}{\mu_v}\right)^{0.056} \left(\frac{\rho_v}{\rho_\ell}\right)^{0.28} \left(\frac{1-Y}{Y}\right)^{0.5}} \; . \tag{B2}$$

The experimentally derived relationship between θ and β is shown graphically in figure B1.

The following equation, B3, fits the experimental curve $\theta(\beta)$ to within 5% of the experimental θ.

$$\theta = 0.8560 + 7.944e^{-16.33(\beta-0.5)^2} \text{ for } 0 \le \beta \le 1 \; . \tag{B3}$$

The value of β for hydrogen near 1 atm pressure is

$$\beta = \frac{1}{1 + 0.380 \left(\frac{1-Y}{Y}\right)^{0.5}} \; . \tag{B4}$$

For single phase liquid flow ($Y = 0$, $\theta = 1$) equation B1 becomes,

$$\left(\frac{\Delta P}{\Delta X}\right)_\ell = \frac{f_{t\ell}}{\rho_\ell} \; \frac{G_\ell^2}{2D} \; . \tag{B5}$$

The ratio of two phase-to-liquid mass flow rates for a given pressure drop per unit length and given pipe size is then obtained from equation (B1) and (B5):
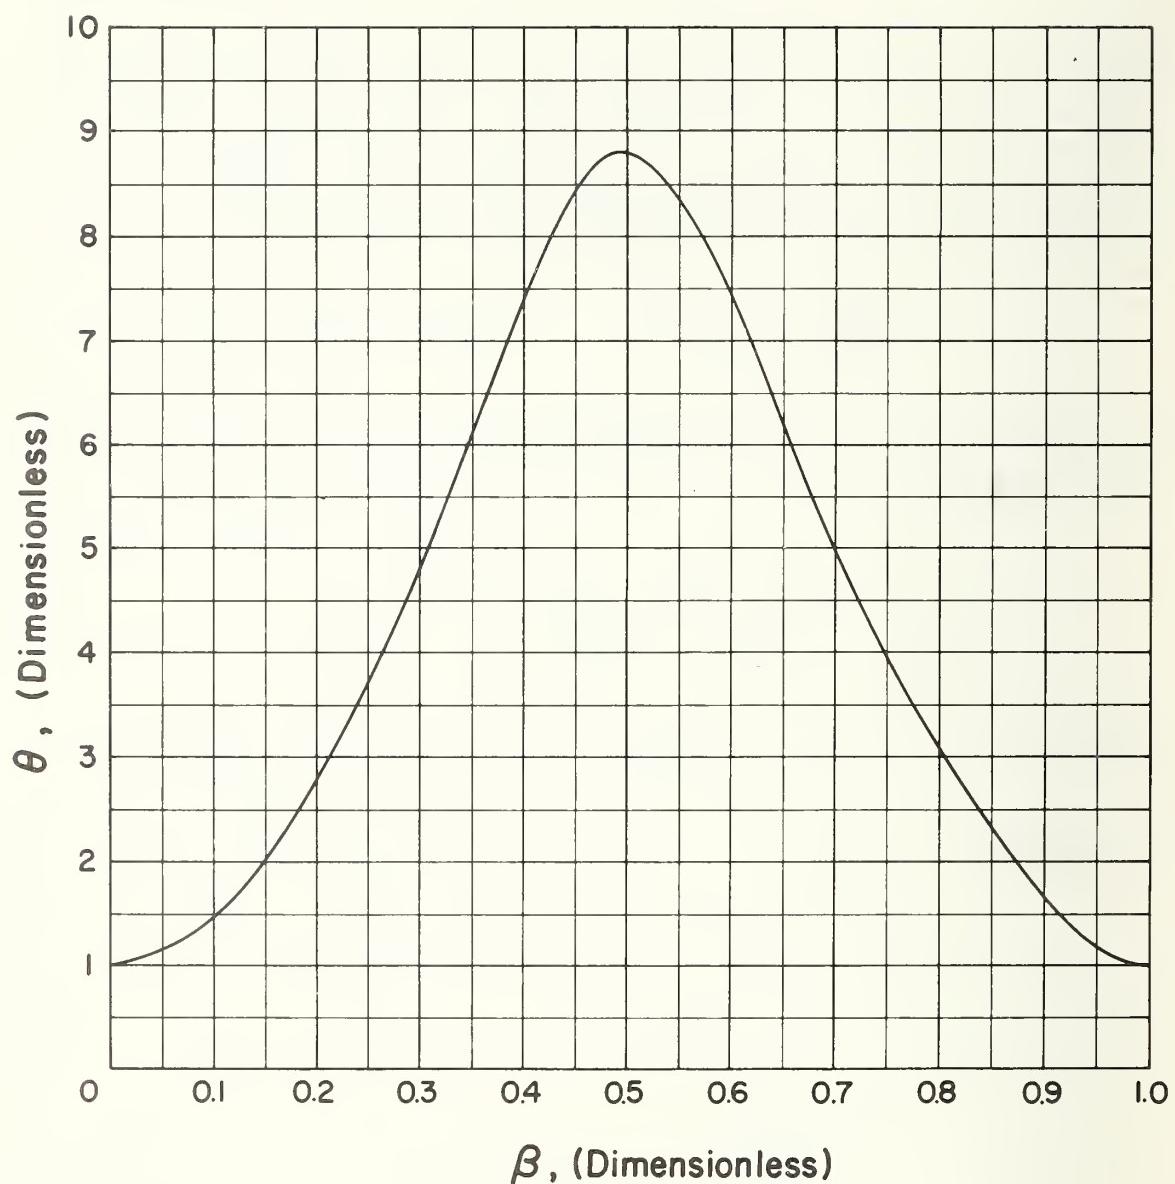
Figure B1. Modified Martinelli-Nelson two phase flow factor.

$$R_G = \frac{G_{tp}}{G_\ell} = \frac{\dot{m}_{tp}}{\dot{m}_\ell} = \left[\theta \left(\frac{\rho_\ell}{\rho_v} \; \frac{f_{tv}}{f_{t\ell}} \; Y^{1.8} + (1 - Y)^{1.8} \right) \right]^{-1/2}. \tag{B6}$$

In general single phase liquid flow will exist up to some point, L_s, in the fill line. Beyond L_s the amount of vapor in the fluid stream will increase from 0 at L_s to a maximum at the pipe discharge. If we let the average value of R_G be defined as

$$\bar{R}_G = \frac{1}{L} \int_o^L R_G dx, \tag{B7}$$

and assume a linear variation of R_G with X from L_s to L, we obtain

$$\bar{R}_G = \frac{1}{2} \left[R_{GL} \left(1 - \frac{L_s}{L} \right) + \left(1 + \frac{L_s}{L} \right) \right]. \tag{B8}$$

The enthalpy of the liquid increases with distance along the pipe due to heat addition and the saturation enthalpy (or saturation temperature) decreases due to pressure drop. The point at which saturation enthalpy equals the fluid enthalpy determines the saturation point L_s which is required in equation (B8). We obtain,

$$\frac{L_s}{L} = \frac{E_{is} - E_{in}}{E_{is} - E_{in} + E_{out} - E_{os}}. \tag{B9}$$

All of the enthalpys on the right side of equation (B9) are calculated in the cold flow program. These enthalpys, however, are a function of the flow rate which in turn varies with the exit quality. Therefore, an iterative solution becomes necessary for the two phase flow ratio:

1. From the initial (assumed single phase liquid flow rate) the enthalpys are calculated for equation (B9).

2. $\bar{R}_G$ from equation (B8).

3. $\dot{m}_{tp}$ from (B6).

The calculation returns to step 1 and steps 1 through 3 are repeated until the final calculated $\dot{m}_{tp}$ is within 0.1% of the assumed value.

Loading of the Minicomputer

The method of loading programs into the minicomputer is described in Section 3.3 of the instruction manual. This appendix is an elaboration of the procedure described there.

The Binary Loader

The binary loader is usually in the minicomputer and is not destroyed by any of the programs. For that reason, following the procedure below should be sufficient to load any program in the minicomputer.

However, occasionally a sharp spike on the power lines or a malfunction of the memory in the computer can cause the binary loader to be destroyed. If this should happen, the "Bootstrapping" procedure must be performed first.

1. Preparing the Teletype

The minicomputer and CRT display must be turned on but not running and the CRT display LOCAL/LINE switch set to LOCAL. The teletype is plugged into the back of the CRT display. Turn the teletype power switch, LINE/OFF/LOCAL, to LINE. With the teletype reader switch in OFF position, place the paper tape containing the program in the reader with the tape coming out toward the front of the teletype and the narrower side from the sprocket holes in the tape toward the outside of the teletype. Position the tape so that unpunched tape is over the read position. Set the reader switch to ON.

2. Loading the Program

On the minicomputer, the upper row of switches is called the Switch Register, and are labeled 0 through 15. The lower row of switches are all momentary switches used for control and their functions are listed on the panel.

Set the Switch Register 0, 1, 2 down and 3 through 15 up. Press control switch RESET and then START. The teletype should start reading paper tape. At the end of each binary block on the tape, the printer mechanism should receive some null character and, thus, cycle or "chuckle". Should it fail to do this, back up to the beginning of the paper tape and try again. Should it still fail it may be necessary to follow the "Bootstrapping" procedure and then try again. If the program loads correctly, it may self start or it may halt the computer. If the computer halts, set all the Switch Register switches down except 14, which must be up, and press START. If subsequent operations are to be between the minicomputer and the CRT display, the LOCAL/LINE switch on the CRT should be set to LINE before pressing START, and the teletype turned to OFF.

If the computer halts in the middle of the tape reading, the teletype has made an error while reading the tape. It is not necessary to start the tape over completely. Merely back the tape up at least one block and start the computer again. The beginning of a block is fairly easy to recognize. It consists of two frames with no punches in the tape except the sprocket hole followed by a frame with at least the four top most positions punched followed by a frame with all positions punched. Reposition the tape on one of the two unpunched positions, set the teletype reader to ON and push START on the minicomputer. If the teletype fails to start "Chuckling", the tape should be restarted at the beginning.

Bootstrapping

It may occasionally be necessary to restart the minicomputer from a completely obliterated condition. To do this, turn on the minicomputer and the CRT display. Set the CRT display LOCAL/LINE switch to LOCAL. Prepare the teletype with the tape marked "CHUCKLING LOADER" in the reader just as you would for any other program tape. Next, follow the instructions in TABLE C-1. After the last line of the table has been executed the computer should read the tape and stop at the end. It will not "chuckle" the teletype. If it does not read the tape, the computer or teletype is likely in need of repair. If it does read the tape correctly, proceed to load program as described in the section, Binary Loader.

Table C-1

Set Switch Register Switch Position: (U = up; D = down)

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Then Press
D	D	D	U	U	U	U	U	U	U	U	D	U	U	U	U	EXAMINE
U	D	U	D	U	U	D	D	D	D	U	D	D	D	D	D	DEPOSIT
D	U	U	D	D	U	U	D	U	D	D	D	U	D	D	D	DEPOSIT NEXT
D	D	D	D	D	D	D	U	D	U	U	U	U	U	U	U	"
D	U	U	D	D	D	D	U	D	U	D	D	U	D	D	D	"
U	U	U	D	U	U	U	D	D	U	D	D	D	D	D	D	"
U	D	U	D	U	U	U	D	D	U	D	D	D	D	D	D	"
U	D	D	D	U	U	U	D	D	D	D	D	D	D	U	U	"
D	D	D	D	D	D	D	U	D	U	U	U	U	D	U	D	"
D	D	D	D	D	D	D	U	D	D	D	D	D	D	D	D	"
D	U	U	D	D	D	D	D	D	U	D	D	U	D	D	D	DEPOSIT NEXT
D	D	D	D	U	D	D	D	U	U	U	U	D	U	U	D	"
U	U	D	D	U	D	D	U	D	D	D	D	D	D	U	U	"
D	D	D	D	U	D	D	U	U	U	U	U	D	U	D	D	"
D	D	D	U	U	U	U	U	U	U	U	U	U	D	D	D	START

Hydrogen Computer Programs

Program CDT
Option 3. Cooldown Time

Due to the length and complexity of the program, a computer flow diagram
and list of computer symbols are included.

```
                                                    ┌──────────────────────────────┐
                                                    │  ⑦⑨  "WITHOUT A PUMP         │
               NP.LE.O. AND. NOPT.GE.3 ────── YES ──│ THERE IS NO PRESSURE DROP"   │
                                                    └──────────────┬───────────────┘
                                                                   │
                   (Pump does not              ┌──────────────────────────┐
                   exist and pump              │     CALL CDT2FILE*        │
                   ΔP has been                 └────────────┬─────────────┘
                   requested)                               │
                                               ┌──────────────────────────┐
                                               │   No output possible      │
                                               └──────────────────────────┘

                        NO

                ┌──────────────────────────────┐
                │        1110-1150             │
                │ Calc C2, DOD5, DOD51, X1     │
                └──────────────┬───────────────┘
                         ┌───────────┐
                         │   1160    │                           ┌──────────────────┐
                         │ X1.GE.XLT │ ──────── YES ─────────────│      1190        │
                         └─────┬─────┘                           │   Calc FXOD      │
                                                                 └────────┬─────────┘
                               NO       (Increment longer
                                        than distance to
                                        size reduction)

                ┌──────────────────────────────┐
                │       1200-1220              │
                │ Calc XPDW*, PR, XUGI*        │
                └──────────────┬───────────────┘
              ┌────────────────────────────────────┐
              │             1240                   │
              │   1000DO 5U I = ISTART-IEND         │
              └──────────────┬─────────────────────┘
                ┌──────────────────────────────┐
                │       1250-1260              │
                │   Calc X1, FLEN              │
                └──────────────┬───────────────┘
                         ┌───────────┐
                         │   1270    │                    ┌──────────────┐
                         │ T.GT.PSTM │ ──────── YES ───────│  Calc PUP    │
                         └─────┬─────┘                    └──────┬───────┘
                               │                                 │
                ┌──────────────────────────────┐
                │          1280                │
                │       Calc XPDW*             │
                └──────────────┬───────────────┘
```

29

1900-1940
(36) Calc PR, UGIF*, UG, UIN, UID

1550-1590
Calc C3, C4, UGIF*, UFIT, C7

UIN.LE.O — YES

1960-1990
Calc UCI, UCLU1, DP

UCL(1).GT.O.O — YES

1600
DO26 K = 1, 15

1610-1840
Iteration for interface
gas velocity, liquid velocity and interface velocity

to (52)

ABS(DU1).LT.0.001 — yes
(velocity within tolerance)

NO

(26) continue

1870
Calc U1, DP

52 NPCY.EQ.1 — YES

neg
or
zero

U1 — pos

(38) Calc Q

2130-2270
Calc ISTART, IEND, T, DP, FLEN, QQ, X1

Q.GE.1.0E+04 — YES — Q=1.0E+04

2290
Calc IEND, XMASSG,
XMASSL
PRINT "WITHOUT A PUMP
THERE IS NO PRESSURE
DROP"

2050-2090
Calc XMASSG, XMASSL, IT, T, UPROPP

to 1000

50 continue
(end of DO loop)   I < IEND

Return to
start of
DO loop

Return to
start of
DO loop

to 1000

I ≥ IEND
Exit from DO loop

CALL CDT2FILE
(Plotting of results)

END

31

AF	Flow cross section area, cm^2
AFL	Flow cross section area, large pipe, cm^2
AFS	Flow cross section area, small pipe, cm^2
AW	Cross section area of the wall at the current liquid-gas interface location, cm^2
AWL	Cross section area of the wall, large pipe, cm^2
AWS	Cross section area of the wall, small pipe, cm^2
C1	Constant used to convert liquid velocity to pressure drop due to the pump
C4	Total heat transferred through uninsulated line to liquid, watts
C6	Same as C7 except reciprocal
C7	AF/AFL-used to correct velocity calculation for area
DENG	Density of the gas at the liquid-gas interface, gm/cm^3
DENL	Density of the liquid, gm/cm^3
DENW	Density of the wall material at the current liquid-gas interface, gm/cm^3
DENWL	Density of wall material, large pipe, gm/cm^3
DENWS	Density of wall material, small pipe, gm/cm^3
DHL	Change in enthalpy from liquid to ambient temperature gas, Joules/gm
DHW	Change in enthalpy at the current liquid-gas interface location, Joules/gm
DHWL	Change in enthalpy, large pipe, Joules/gm
DHWS	Change in enthalpy, small pipe, Joules/gm
DIAIL	Large diameter before reduction, in-cm
DIAIS	Small diameter after transition, in-cm
DIAOL	Outer diameter of the large pipe, cm
DIAOS	Outer diameter of the small pipe, cm
DOD5	$(DIAIS/DIAIL)^5$
DP	Pressure drop across the pump at a particular time during cooldown, psi
DPP	Reference pressure, psi
DU1	Constants used during an iteration calculation; difference between a trial velocity and a calculated velocity, cm/sec
DU2	Same as DU1
DX	Length increment, cm

2. CDT

F	Friction factor
FLEN	Total length of line cooled, cm
FLOW	Flow rate, gpm
FXOD	Friction factor times the gas column length divided by an effective diameter
H	Surface heat transfer coefficient, watts/cm^2
HMAX	Maximum length cooled without running the pump, cm
IEND	Number of DX increments required to traverse entire length of pipe to be cooled
II	Used to count number of DX lengths calculated
MU	Wall material for a uniform pipe size
MWL	Wall material before transition
MWS	Wall material after transition
O2TL	Supply liquid level, ft
NI	Existence of vacuum insulation, 0-yes, 1-no
NOPT	
NP	Existence of pump, 0-no, 1-yes
NPCY	Indicates whether pump has started, 1-no, 2-yes
NPS	Pump free wheeling-0, started after PSTM-1
NV	No. of the discharge valve which is open
NVR	Existence of vertical rise, 0-yes, 1-no
PG	First value of pressure in iteration, psi
PG1	Supply pressure, psi
PMAXL	Maximum length cooled when pump is running, cm
PMAXP	Maximum liquid driving pressure when the pump is running, psia
PP	Reference pressure, psi
PR	Pressure ratio across the gas column in the pipe
PSTM	Pump start-up time, min
PUP	Upstream pressure acting to push liquid into pipeline, psia
PDWF	An external function used to calculate a pressure due to a head vise
PDWN	Pressure at the liquid-gas interface; is equal to upstream pressure minus a head due to any vertical rise

3. CDT

Q	Flow, gal/min
QPP	Print out of initial flow rate, gal/min
RE	Reynolds number
RELHU	Relative humidity, percent
RPM	Pump speed after it is started, RPM
T	Time in interation loop, sec
TAMB	Ambient temperature, deg F
TIP	Print time, sec
U	Liquid-gas interface velocity as it moves down the pipe, cm/sec
UCI	Velocity of liquid vapor interface, ft/sec
UCL	Velocity of liquid determined by boil-off gas, ft/sec
UFIT	A constant to fit the gas velocity versus pressure ratio
UGI	Gas velocity at the interface, cm/sec
UID	Denominator in expression for UCl
UIN	Numerator in expression for UCl
UL	Liquid velocity in pipe due to pump pressure drop, cm/sec
ULLP	Ullage pressure, psig
UPI	Uniform pipe inside diameter, in-cm
UPWT	Uniform pipe wall thickness
WIND	Wind velocity, knots
WTL	Wall thickness before transition, in
WTS	Wall thickness after transition, in
XCL	Length of line to be cooled, ft
XFINAL	Final length, cm
XL	Total length of line, ft
XLT	Length before size reduction, ft

4.   CDT

XLV   Length to vertical rise, ft
XOD   Gas column length divided by an effective diameter
XTV   Length of pipe before vertical rise, ft
X1   Liquid column length, cm

Function Subroutines

CDS

CDXMAX   Maximum cooldown length, ft
HTTRAN   Return heat transfer coefficient, Btu/lb°F
PDWF   Return liquid-vapor interface pressure
UGIF   Used to calculate gas velocity in the gas column supplied an
            FXOD, and a pressure ratio

Option 1, Thermal Stresses

```
10  DIMENSION P(12)
20  DIMENSION XL(9),D(9),H(2)
30  DATA P/32.29,-0.4254,261.8,-3.104,1304.,-11.2,
40&   0.334,-0.348,2.154,-2.86,10.87,-10.731/
50  READ:PFID,POD,PFOD,MF
60  I=1
70  IF(MF.GT.1) I=7
80  TOD=(PFOD-PFID)/(2.0*PFID)
90  C1=P(I)*EXP(P(I+1)*TOD)
100  C2=P(I+2)*EXP(P(I+3)*TOD)
110  C3=P(I+4)*EXP(P(I+5)*TOD)
120  WMAX=PFID*(C1+C2+C3)
130  WMIN=0.00661442*PFID**2+0.02219435*PFID-0.01880877
140  GPML=WMAX*101.6
150  GPMS=WMIN*101.6
160  PRINT:"&"
170  DO 9 I=1,9
180  9 PRINT:" "
190  PRINT:"THE MAXIMUM FLOW PERMITTED WITHOUT CAUSING EXCESSIVE THERMAL"
200  PRINT:" "
210  PRINT:"STRESS IS ",GPML,"  GPM"
220  PRINT:" "
230  PRINT:" "
240  PRINT:" "
250  PRINT:"THE MINIMUM FLOW PERMITTED WITHOUT CAUSING EXCESSIVE THERMAL"
260  PRINT:" "
270  PRINT:"STRESS IS ",GPMS,"  GPM&"
280  END
```

Program CDT

Option 3, Cooldown Time

```
10 USE CDTSUB;PLOT;CDT2FILE
20 COMMON DHL,TAMB,RELHU,DIAIL,DIAIS,DIAOL,DIAOS,AFS,AFL,TXL,XCL,XLT
30 COMMON XLV,XTV,WIND,KKK,H,DVV,AVV
40 COMMON XL(9),D(9),HH(2),NTOB,XMASSL,XMASSG,PSTM
50 COMMON FLEN(105),T(105),O(105),DP(105),NP,NPS,NOPT,IEND
60 DIMENSION UL(2),UCL(2)
70 DIMENSION XXL(9),DD(7)
80 READ:(XXL(I),I=1,5)
90 READ:(XXL(I),I=6,9),DD(1)
100 READ:(DD(I),I=2,6)
110 READ:DD(7),GALR,VWT,H1,GPM
120 DO 200 J=1,7
130 200 IF(DD(J).LE.0.1)DD(J)=0.1
140 READ:PUMP,SPD,ULLP,SVOL,MI
150 READ:OX
160 READ:HWL,MW5,MW6,MW7,MW8
170 READ:MW9,WTL,WTS,WT6,WT7
180 READ:WT8,WT9,XCL,NP,NPS
190 READ:PSTM,RPM,NOPT
200 DIAIL=DD(1)
210 DO 201 J=1,3
220 D(J)=DD(1)
230 201 XL(J)=XXL(1)/3.
240 D(3)=DD(2)
250 D(4)=D(3)
260 XL(4)=XXL(2)
270 DO 202 J=5,9
```

36

```
280  D(J)=DD(3)
290  202 XL(J)=XXL(3)/6.
300  HH(1)=XXL(3)/6.
310  HH(2)=XXL(3)/6.
320  TAMB=85.0
330  WIND=10.
340  RELHU=80.
350  CAP=900000.
360  RSPH=0.62035*CAP**0.33333
370  VUL=CAP-SVOL
380  O2TL=2.*RSPH-0.477465*VUL/(RSPH*RSPH)
390  NTOB=1
400  XLT=XL(1)+XL(2)+XL(3)+XL(4)
410  XTV=XLT-XL(4)
420  PP=(-3.782475+0.012881335*RPM+0.2610459E-3*RPM*RPM)*0.494401
430  IF(NTOB.GT.2)GO TO 40
440  TXL=XLT+XL(5)+XL(7)+XL(8)+XL(9)+HH(1)+HH(2)
450  DVV=(D(7)+D(8)+D(9))/3.0
460  XLX=XL(7)+XL(8)+XL(9)+HH(1)+HH(2)
470  GO TO 41
480  40 TXL=XLT+XL(5)+XL(6)
490  DVV=D(6)
500  XLX=XL(6)
510  41 CONTINUE
520  DIAIS=D(5)
530  XMASSG=0.0
540  XMASSL=0.0
550  PI=3.141592654
560  DENL=0.07080
570  TXL=TXL*30.48
580  XCL=XCL*30.48
590  XLX=XLX*30.48
600  XLT=XLT*30.48
610  IF(XCL.GT.TXL) XCL=TXL
620  ISTART=1
630  FLEN(1)=0.0
640  TFINAL=0.0
650  XFINAL=0.0
660  DVV=DVV*2.54
670  DIAIL=DIAIL*2.54
680  DIAIS=DIAIS*2.54
690  IF(DVV.GT.DIAIS) DVV=DIAIS
700  DIAOL=DIAIL+5.08*WTL
710  DIAOS=DIAIS+5.08*WTS
720  AVV=PI/4.0*DVV*DVV
730  AFL=PI/4.0*DIAIL*DIAIL
740  AFS=PI/4.0*DIAIS*DIAIS
750  AWL=PI/4.0*(DIAOL**2-DIAIL**2)
760  AWS=PI/4.0*(DIAOS**2-DIAIS**2)
770  C1=11584.0
780  DHL=4456.1
790  IF(MWL-2) 5,6,7
800  5 DHWL=75.55
810  DENWL=7.88
820  GO TO 8
830  6 DHWL=157.15
840  DENWL=2.699
850  GO TO 8
860  7 DHWL=75.55
870  DENWL=8.90
880  8 IF(MWS-2)9,10,11
890  9 DHWS=75.55
900  DENWS=7.88
```

37

```
 910 GO TO 12
 920 10 DHWS=157.15
 930 DENWS=2.699
 940 GO TO 12
 950 11 DHWS=75.55
 960 DENWS=8.90
 970 12 PUP=O2TL*0.03069+ULLP+14.696
 980 PG=PUP
 990 PG1=PUP
1000 PP=PP+PG1
1010 IF (NP.EQ.0.OR.NPS.EQ.0) PSTM=1.E10
1020 H=0.0
1030 KKK=1
1040 IF(NI.EQ.1) CALL HTTRAN(60.0)
1050 KKK=2
1060 NPCY=1
1070 DX=XCL/97
1080 IEND=98
1090 IF(NPS.EQ.1.AND.NP.EQ.1) NPCY=2
1100 IF((NP.LE.0).AND.(NOPT.GE.3)) GO TO 79
1110 56 C2=3.0086E-03/(TAMB+460.0)
1120 T(1)=0.0
1130 DOD5=(DVV/DIAIL)**5.0
1140 DOD51=(DVV/DIAIS)**5.0
1150 X1=DX/2.0
1160 IF(X1.GE.XLT) GO TO 14
1170 FXOD=((XLT-X1)*DOD5+(TXL-XLT-XLX)*DOD51+XLX)*0.02/DVV
1180 GO TO 15
1190 14 FXOD=0.02*((TXL-X1)*DOD51+XLX)/DVV
1200 15 CALL XPDW(X1,PDWF)
1210 PR=(PUP-PDWF)/14.696
1220 CALL XUGI(PR,FXOD,UGI)
1230 X1=-DX
1240 1000 DO 50 I=ISTART,IEND
1250 X1=X1+DX
1260 FLEN(I+1)=FLEN(I)+DX/30.48
1270 IF(T(I).GT.PSTM) PUP=PP-5.960636E-8*QPP*QPP
1280 CALL XPDW(X1,PDWN)
1290 IF((PUP-PDWN).LT.0.0) GO TO 52
1300 DENG=(PUP-PDWN)*C2
1310 IF(X1.GE.XLT) GO TO 20
1320 XOD=((XLT-X1)*DOD5+(TXL-XLT-XLX)*DOD51+XLX)/DVV
1330 AW=AWL
1340 DENW=DENWL
1350 DHW=DHWL
1360 XI=PI*DIAOL*X1
1370 AF=AFL
1380 GO TO 22
1390 20 XOD=((TXL-X1-XLX)*DOD51+XLX)/DVV
1400 AW=AWS
1410 DENW=DENWS
1420 DHW=DHWS
1430 XI=PI*((DIAOL*XLT)+(X1-XLT)*DIAOS)
1440 AF=AFS
1450 22 RE=11161.*DENG*UGI*DIAIS
1460 IF(RE.LT.3.0E3) RE=3.0E3
1465 RUF=101.6/DIAIS
1466 IF(RUF.GT . 60.) RUF=60.
1470  F=0.0055*(1.0+(RUF+1.E6/RE)**0.33333)
1480 FXOD=XOD*F
1490 PG=-0.02
1500 C6=AVV/AF
1510 IF(NI.LT.1) GO TO 24
```

38

```
1520 CALL HTTRAN(T(I)*60.0)
1530 24 IF (NP.EQ.0) GO TO 36
1540 IF(T(I).GT.PSTM) GO TO 36
1550 C3=AF*DHL
1560 C4=H*XI
1570 CALL XUGI(1.1,FXOD,UGIF)
1580 UFIT=UGIF*C6/0.1
1590 C7=AF/AFL
1600 DO 26 K=1,15
1610 KK=K
1620 DO 71 IK=1,2
1630 IF(PUP-PDWN-PG) 28,28,30
1640 28 PG=PUP-PDWN
1650 UL(IK)=0.0
1660 GO TO 33
1670 30 UL(IK)=SQRT(C1*(PUP-PDWN-PG))
1680 33 DENG=PG*C2
1690 PR=PG/14.696
1700 IF(PR.GT.1.1) GO TO 72
1710 UG=UFIT*PR-UFIT
1720 GO TO 73
1730 72 CALL XUGI(PR,FXOD,UGIF)
1740 UG=UGIF*C6
1750 73 IF(PR.LT.0.0) UG=0.0
1760 UCI=((UG*DENG*C3)-C4)/(C5+(DENG*C3))
1770 UCL(IK)=(UCI+DENG/DENL*(UG-UCI))*C7
1780 PG=PG-0.01
1790 71 CONTINUE
1800 DU1=UL(1)-UCL(1)
1810 DU2=UL(2)-UCL(2)
1820 IF(ABS(DU1).LT.0.001) GO TO 34
1830 PG=PG+0.02-DU1*0.01/(DU1-DU2)
1840 UGI=UG
1850 26 CONTINUE
1860 GO TO 52
1870 34 U1=1.0/UCI
1880 DP(I)=PUP-PDWN-PG
1890 IF(U1) 52,52,38
1900 36 PR=(PUP-PDWN)/14.696
1910 CALL XUGI(PR,FXOD,UGIF)
1920 UG=UGIF*C6
1930 UIN=(UG*DENG*AF*DHL)-(H*XI)
1940 UID=(DENV*AV*DHV)+(DENG*AF*DHL)
1950 IF(UIN.LE.0.0) GO TO 52
1960 UCI=UIN/UID
1970 UCL(1)=(UCI+DENG*(UG-UCI))*AF/AFL
1980 U1=UID/UIN
1990 DP(I)=PG1-PUP
2000 IF(UCL(1).GT.0.0) GO TO 38
2010 GO TO 52
2020 38 O(I)=AFL*60.0*UCL(1)/4546.1
2030 IF(O(I).GT.1.E+4) O(I)=1.E+4
2040 XMASSG=XMASSG+DENG*AF*UG*U1*DX
2050 XMASSL=XMASSL+DENL*AF*UCL(1)*U1*DX
2060 II=I
2070 T(I+1)=T(I)+U1*DX/60.0
2080 UPR=U1
2090 OPP=O(1)
2100 50 CONTINUE
2110 GO TO 100
2120 52 IF(NPCY.EQ.1) GO TO 100
2130 ISTART=II+3
2140 IEND=IEND+3
```

39

```
2150  T(II+1)=T(II)+0.001
2160  T(II+2)=PSTM-0.001
2170  T(II+3)=PSTM+0.001
2180  DP(II+1)=0.0
2190  DP(II+2)=0.0
2200  FLEN(II+1)=FLEN(II)
2210  FLEN(II+2)=FLEN(II)
2220  FLEN(II+3)=FLEN(II)
2230  Q(II+1)=XI*H/(DHL*DENL*75.76833)
2240  Q(II+2)=Q(II+1)
2250  X1=X1-DX
2260  NPCY=1
2270  GO TO 1000
2280  100 CONTINUE
2290  IEND=II
2300  XMASSG=XMASSG/453.59
2310  XMASSL=XMASSL/453.59
2320  79 PRINT:"WITHOUT A PUMP THERE IS NO PRESSURE DROP#"
2330  CALL CDT2FILE
2340  END
```

Subroutine CDT2FILE

Graph Headings and Labels for CDT

```
10  SUBROUTINE CDT2FILE
20  COMMON DHL,TAMB,RELHU,DIAIL,DIAIS,DIAOL,DIAOS,AFS,AFL,TXL,XCL,XLT
30  COMMON XLV,XTV,WIND,KKK,H,DVV,AVV
40  COMMON XL(9),D(9),HH(2),NTOB,XMASSL,XMASSG,PSTM
50  COMMON FLEN(105),T(105),Q(105),DP(105),NP,NPS,NOPT,IEND
60  ASCII A1(42),A2(14),A3(14),B1(14),CC1(7)
70  T(IEND+1)=T(IEND)
80  T(IEND+2)=0.0
90  ENCODE(B1,75)
100  75 FORMAT(20X,"TIME IN MINUTES",21X)
110  ENCODE (A3,55)
120  55 FORMAT(56X)
130  IF (NP-1) 61,62,62
140  61 ENCODE (A2,77)
150  77 FORMAT(13X,"THERE IS NO PUMP IN THE SYSTEM",13X)
160  GO TO 56
170  62 IF (NPS-1) 63,64,64
180  63 ENCODE (A2,79)
190  79 FORMAT(4X,"THRU A FREEWHEELING PUMP DURING THE ENTIRE PERIOD",3X)
200  GO TO 56
210  64 IPSTM=PSTM
220  ENCODE (A2,76) IPSTM
230  76 FORMAT(11X,"UNTIL PUMP STARTS AT",I6," MINUTES",11X)
240  56 CONTINUE
250  IML=XMASSL
260  IMG=XMASSG
270  IF (NOPT.EQ.2) ENCODE (A3,65) IML,IMG
280  65 FORMAT("  TOTAL LIQUID INFLOW",I8," LBS, TOTAL VENT",I6," LBS ")
290  ENCODE (A1,2) A2,A3
300  2 FORMAT("   LIQUID IS DRIVEN BY ULLAGE PRESSURE AND STATIC HEAD   "
310  IF (NOPT-2) 81,82,83
320  81 FLEN(IEND+1)=FLEN(IEND)
330  FLEN(IEND+2)=0.0
340  ENCODE(CC1,74)
350  74 FORMAT(6X,"LENGTH COOLED FT",6X)
```

```
360 CALL GRAPH(A1,B1,CC1,IEND,T,FLEN)
370 GO TO 85
380 82 IEND=IEND-2
390 T(IEND+1)=T(IEND)
400 T(IEND+2)=0.0
410 Q(IEND+1)=Q(IEND)
420 Q(IEND+2)=0.0
430 ENCODE(CC1,78)
440 78 FORMAT(7X,"FLOW RATE GPM",8X)
450 CALL GRAPH (A1,B1,CC1,IEND,T,Q)
460 GO TO 85
470 83 DP(IEND+1)=DP(IEND)
480 ENCODE(CC1,48)
490 48 FORMAT(6X,"PUMP DELTA P PSI",6X)
500 DP(IEND+2)=0.0
510 CALL GRAPH (A1,B1,CC1,IEND,T,DP)
520 85 CONTINUE
530 RETURN
540 END
```

Heat Transfer and Pressure Drop Subroutines for CDT

```
5 SUBROUTINE HTTRAN (TIME)
10 COMMON DHL,TAMB,RELHU,DIAIL,DIAIS,DIAOL,DIAOS,AFS,AFL,TXL,XCL,XLT
15 COMMON XLV,XTV,WIND,KKK,HCRD,DVV,AVV
20 COMMON XL(9),D(9),HH(2),NTOB
300 DAVG=(DIAOL+DIAOS)/2.
310 HCRD=1.6846/(DAVG**0.25)
330 RETURN
335 END
340 SUBROUTINE XPDW(X1,PDWF)
345 COMMON DHL,TAMB,RELHU,DIAIL,DIAIS,DIAOL,DIAOS,AFS,AFL,TXL,XCL,XLT
350 COMMON XLV,XTV,WIND,KKK,H,DVV,AVV
355 COMMON XL(9),D(9),HH(2),NTOB
360 X=X1/30.48
365 CONV=0.030694
370 IF(X.GT.XTV) GO TO 5
375 PDWF=0.0
380 RETURN
385 5 IF(X.GT.(XTV+XL(4)+XL(5))) GO TO 10
390 PDWF=(X-XTV)*CONV
395 RETURN
400 10 IF(NTOB.EQ.2) GO TO 15
405 IF(X.GT.(XTV+XL(4)+XL(5)+XL(7))) GO TO 20
410 15 PDWF=(XL(4)+XL(5))*CONV
415 RETURN
420 20 IF(X.GT.(XTV+XL(4)+XL(5)+XL(7)+HH(1))) GO TO 25
425 PDWF=(X-XTV-XL(7))*CONV
430 RETURN
435 25 IF(X.GT.(XTV+XL(4)+XL(5)+XL(7)+HH(1)+XL(8))) GO TO 30
440 PDWF=(XL(4)+XL(5)+HH(1))*CONV
445 RETURN
450 30 IF(X.GT.(XTV+XL(4)+XL(5)+XL(7)+HH(1)+XL(8)+HH(2))) GO TO 40
455 RETURN
460 40 PDWF=XLV*CONV
465 RETURN
470 END
475 SUBROUTINE XUGI(X,FXODI,UGIF)
```

41

```
480 IF(X.GT.1.0.AND.FXODI.GT.0.0) GO TO 10
485 UGIF=0.0
490 IF(FXOLI.LE.0.0)UGIF=1.340E05
495 RETURN
500 10 PR=X
505 SONO2=1.340E05
510 CHN=SQRT(6.25+6.0/(PR*PR))-2.5
515 FXOD=FXODI
520 FLODCH=(1.0-CHN)/(1.4*CHN)+0.85714*ALOG(1.2*CHN/(1.0+0.2*CHN))
525 IF(FXOD.LE.0.0) FXOD=0.1E-8
530 IF(FXOD.LE.FLODCH) GO TO 45
535 GN2=0.71428*(1.0-1.0/(PR*PR))/(FXOD-0.85714*ALOG(1.0/(PR*PR)))
540 F2=1.0/GN2
545 DO 44 IITRY=1,50
550 GN3=SQRT(6.25+5.0*(PR*PR)*GN2*(1.0+0.2*GN2))-2.5
555 F3=1.0/GN3
560 FXODT=0.71428*(F2-F3)+0.85714*ALOG((F3+0.2)/(F2+0.2))
565 ERR=FXOD-FXODT
570 IF(ABS(ERR/FXOD).LT.0.001) GO TO 80
575 DF3DF2=(F2+0.4)*(F3+0.2)*F3/((F3+0.4)*(F2+0.2)*F2)
580 DER=0.71428*(1.0-DF3DF2)+0.85714*(DF3DF2/(F3+0.2)-1.0/(F2+0.2))
585 F2=F2+ERR/DER
590 GN2=1.0/F2
595 44 CONTINUE
600 PRINT:"VG1 DID NOT CONVERGE#",X,FXODI
605 GO TO 80
610 45 GM2=1.0/(0.965*(FXOD**0.5229)+1.0)
615 GN2=GM2**2
620 F2=1.0/GN2
625 F3=1.0
630 DO 70 ITRY=1,50
635 FXODT=0.71428*(F2-F3)+0.85714*ALOG((F3+0.2)/(F2+0.2))
640 ERR=FXOD-FXODT
645 IF(ABS(ERR/FXOD).LT.0.001) GO TO 80
650 DF3DF2=(F2+0.4)*(F3+0.2)*F3/((F3+0.4)*(F2+0.2)*F2)
655 DER=0.71428*(1.0-DF3DF2)+0.85714*(DF3DF2/(F3+0.2)-1.0/(F2+0.2))
660 F2=F2+ERR/DER
665 GN2=1.0/F2
670 70 CONTINUE
675 PRINT:"VG1 DID NOT CONVERGE#",X,FXODI
680 80 IF(GN2.LE.0.0) RETURN
685 VO=SQRT(GN2)
690 UGIF=VO*SONO2
695 90 RETURN
700 END
```

Program CF
Option 6. Cold Flow

Due to the length and complexity of this program, a computer flow diagram
and a list of computer symbols are included.
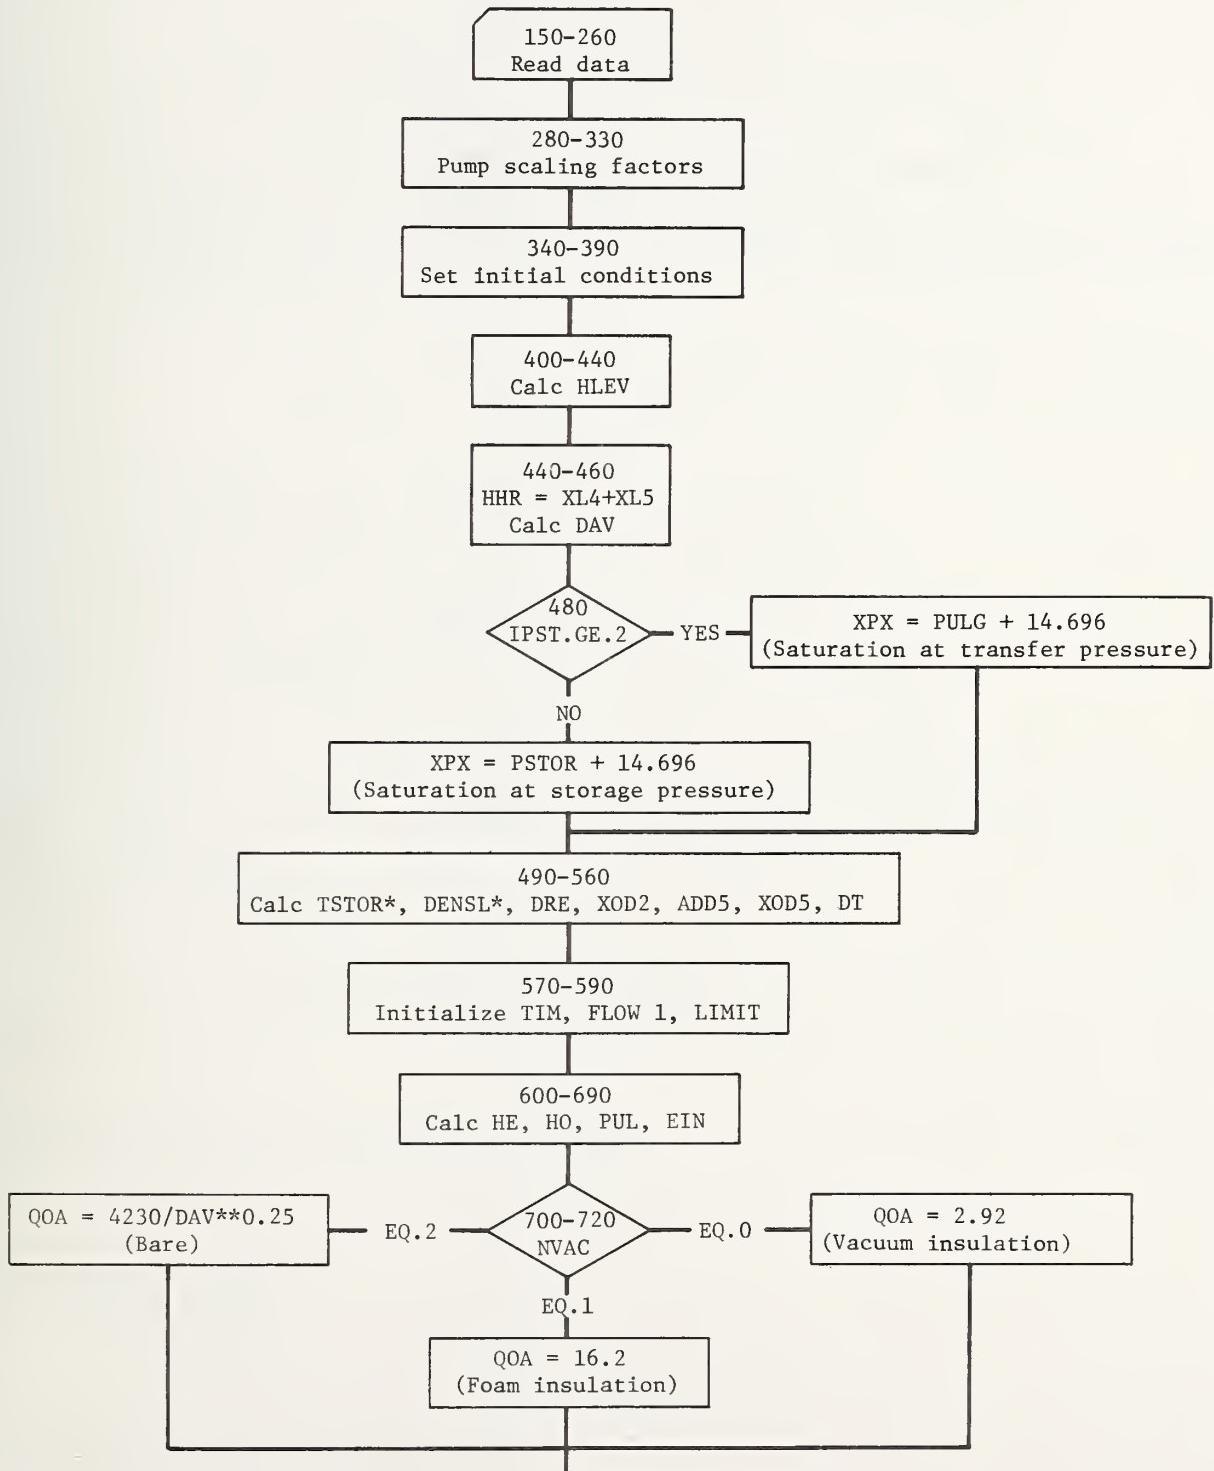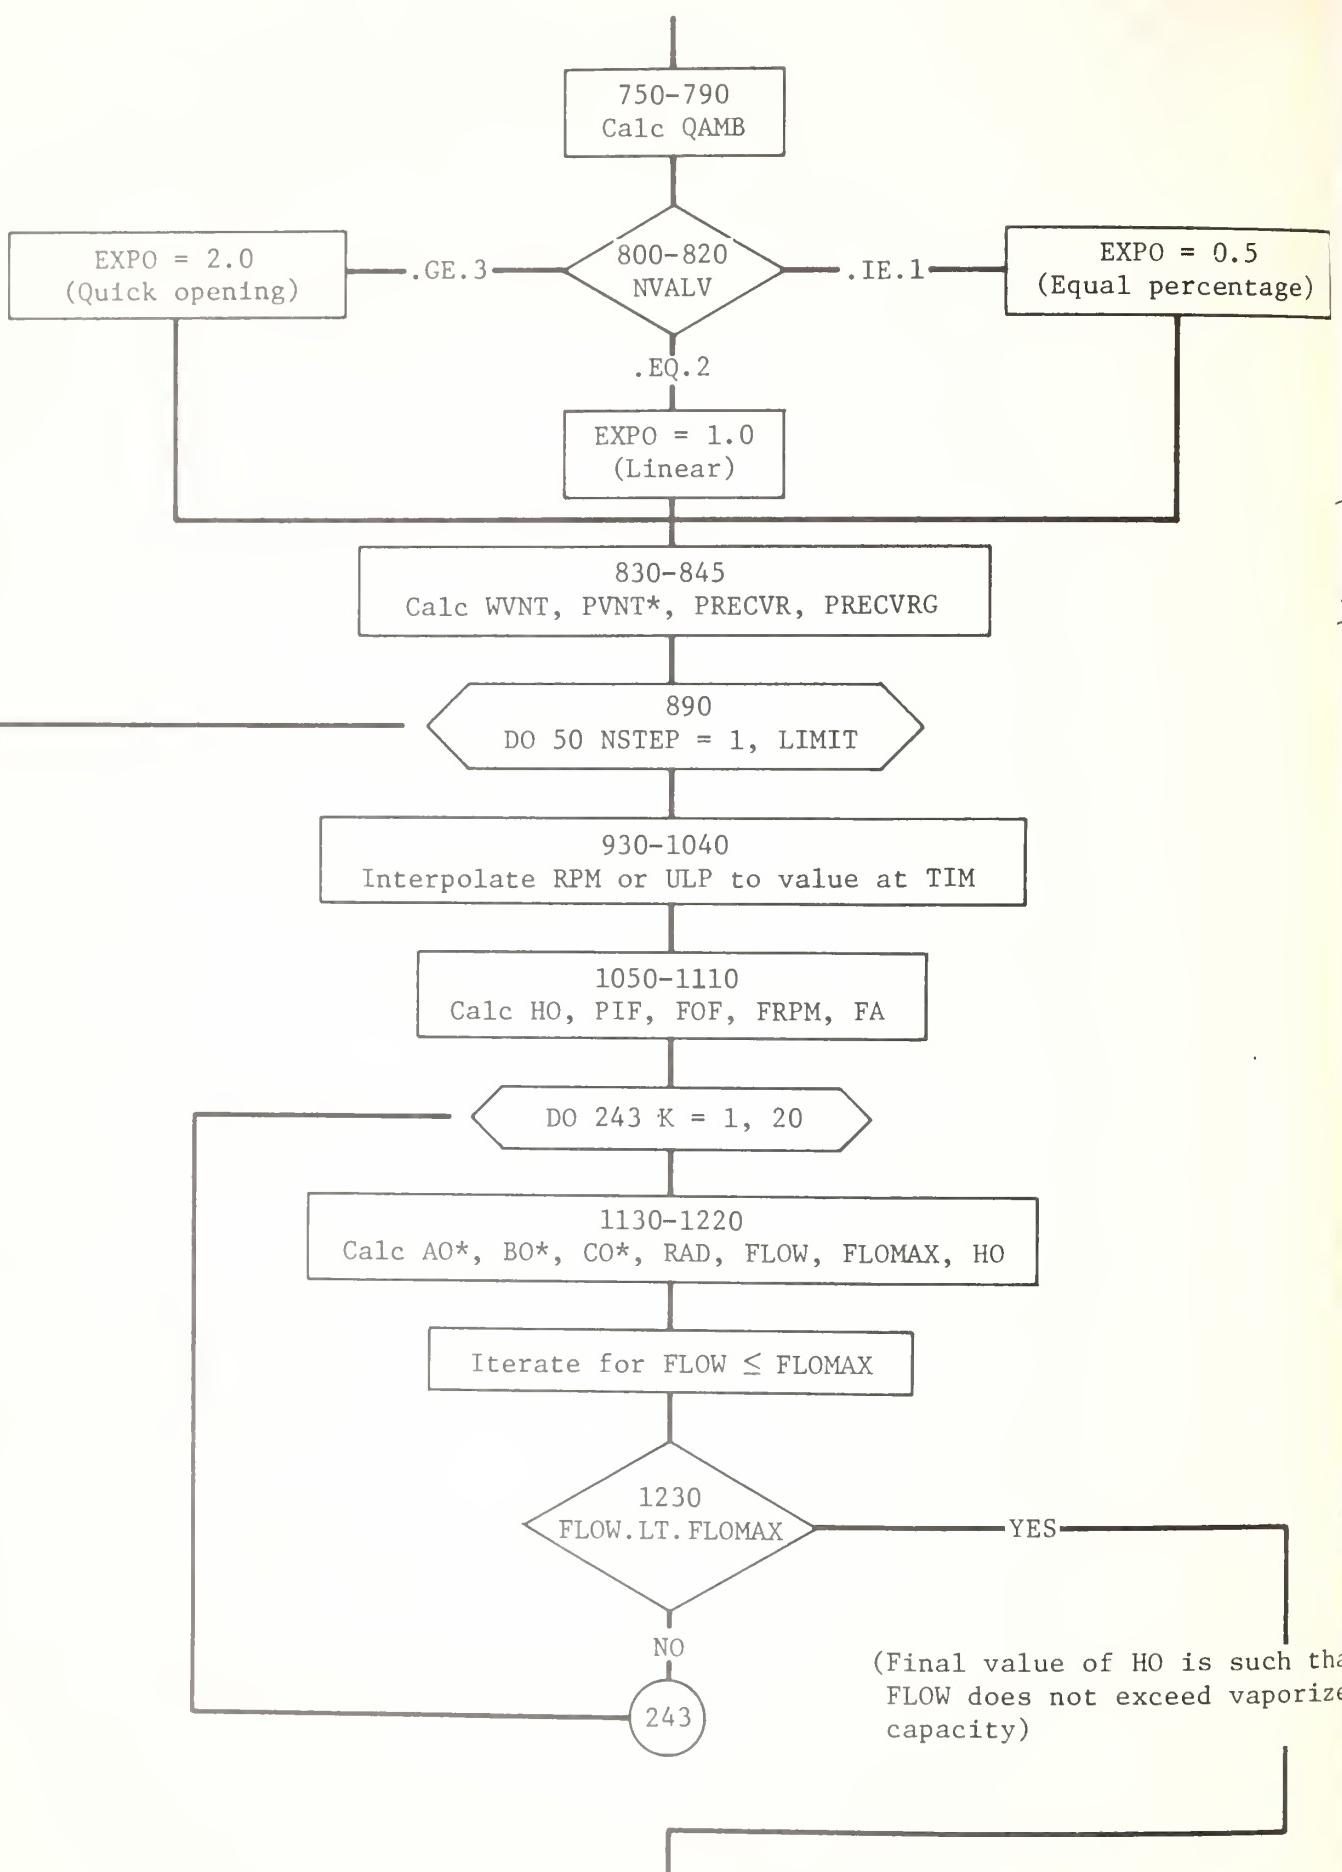
```
                          ┌──────────────────┐
                          │    150-260       │
                          │    Read data     │
                          └──────────────────┘
                                   │
                          ┌──────────────────────┐
                          │      280-330         │
                          │ Pump scaling factors │
                          └──────────────────────┘
                                   │
                          ┌──────────────────────┐
                          │      340-390         │
                          │ Set initial conditions│
                          └──────────────────────┘
                                   │
                          ┌──────────────────┐
                          │    400-440       │
                          │   Calc HLEV      │
                          └──────────────────┘
                                   │
                          ┌──────────────────┐
                          │    440-460       │
                          │  HHR = XL4+XL5   │
                          │   Calc DAV       │
                          └──────────────────┘
                                   │
                              ◇ 480                      ┌──────────────────────────────────┐
                              IPST.GE.2 ──── YES ────────│   XPX = PULG + 14.696             │
                                   │                     │ (Saturation at transfer pressure) │
                                  NO                     └──────────────────────────────────┘
                                   │                                    │
                    ┌──────────────────────────────┐                    │
                    │   XPX = PSTOR + 14.696        │                    │
                    │ (Saturation at storage pressure)│                  │
                    └──────────────────────────────┘                    │
                                   │────────────────────────────────────┘
          ┌─────────────────────────────────────────────────────────┐
          │                    490-560                               │
          │ Calc TSTOR*, DENSL*, DRE, XOD2, ADD5, XOD5, DT           │
          └─────────────────────────────────────────────────────────┘
                                   │
            ┌──────────────────────────────────────────┐
            │               570-590                     │
            │ Initialize TIM, FLOW 1, LIMIT             │
            └──────────────────────────────────────────┘
                                   │
            ┌──────────────────────────────────────────┐
            │               600-690                     │
            │ Calc HE, HO, PUL, EIN                     │
            └──────────────────────────────────────────┘
                                   │
┌──────────────────────────┐    ◇ 700-720      ┌──────────────────────────────┐
│ QOA = 4230/DAV**0.25     │── EQ.2 ── NVAC ── EQ.0 ──│ QOA = 2.92              │
│        (Bare)            │                   │   (Vacuum insulation)        │
└──────────────────────────┘        │          └──────────────────────────────┘
                                   EQ.1
                          ┌──────────────────────┐
                          │   QOA = 16.2         │
                          │ (Foam insulation)    │
                          └──────────────────────┘
```

```
                              ┌──────────────────┐
                              │     750-790      │
                              │    Calc QAMB     │
                              └──────────────────┘
                                       │
┌──────────────────┐                  ◇                  ┌──────────────────────┐
│   EXPO = 2.0     │──.GE.3──┐   800-820   ┌──.IE.1──│   EXPO = 0.5         │
│ (Quick opening)  │         │   NVALV     │          │ (Equal percentage)   │
└──────────────────┘              ◇                   └──────────────────────┘
                                  │
                                .EQ.2
                                  │
                         ┌──────────────────┐
                         │   EXPO = 1.0     │
                         │    (Linear)      │
                         └──────────────────┘
                                  │
               ┌────────────────────────────────────────┐
               │              830-845                    │
               │  Calc WVNT, PVNT*, PRECVR, PRECVRG      │
               └────────────────────────────────────────┘
                                  │
               ⬡────────────────────────────────────────⬡
               │              890                         │
               │       DO 50 NSTEP = 1, LIMIT            │
               ⬡────────────────────────────────────────⬡
                                  │
               ┌────────────────────────────────────────┐
               │            930-1040                     │
               │  Interpolate RPM or ULP to value at TIM │
               └────────────────────────────────────────┘
                                  │
               ┌────────────────────────────────────────┐
               │           1050-1110                     │
               │   Calc HO, PIF, FOF, FRPM, FA          │
               └────────────────────────────────────────┘
                                  │
               ⬡────────────────────────────────────────⬡
               │        DO 243 K = 1, 20                 │
               ⬡────────────────────────────────────────⬡
                                  │
               ┌────────────────────────────────────────┐
               │           1130-1220                     │
               │ Calc AO*, BO*, CO*, RAD, FLOW, FLOMAX, HO│
               └────────────────────────────────────────┘
                                  │
               ┌────────────────────────────────────────┐
               │     Iterate for FLOW ≤ FLOMAX          │
               └────────────────────────────────────────┘
                                  │
                                  ◇
                           1230
                      FLOW.LT.FLOMAX ─────YES─────┐
                                  ◇
                                  │
                                 NO        (Final value of HO is such tha
                                  │         FLOW does not exceed vaporize
                                (243)       capacity)
```

44

```
                    ┌─────────────────┐
                    │  Stored Array   │────────────    │ │ │ ││ │
                    │ YPLOT VS. TIM.  │
                    └─────────────────┘
                             │
                           ╱─┴─╲
                         ╱       ╲
                       ╱    1920    ╲
                     ╱ FLOW.LE.FSAVE  ╲
                    ⟨(Establishes FSAVE as⟩──── YES ──┐
                     ╲ maximum flow)  ╱                │
                       ╲           ╱                   │
                         ╲       ╱                     │
                           ╲─┬─╱                       │
                            NO                         │
                    ┌─────────────────┐                │
                    │  FSAVE = FLOW   │────────────────┘
                    │  TSAVE = TOUT   │
                    └─────────────────┘
                             │
                    ┌─────────────────┐
                    │  FLOW 1 = FLOW  │
                    └─────────────────┘
                             │
         ┌────────⎛  50  ⎞────┤
         │         ⎝──────⎠   ┌─────────────────┐
         │                    │    continue     │
         │                    └─────────────────┘
         │                             │
         │                    ┌─────────────────┐
         │                    │  CALL CF2FILE   │
         │                    │(Plotting routine)│
         │                    └─────────────────┘
         │                             │
         │                          ⎛      ⎞
         │                          ⎜ STOP ⎟
         │                          ⎝      ⎠
```
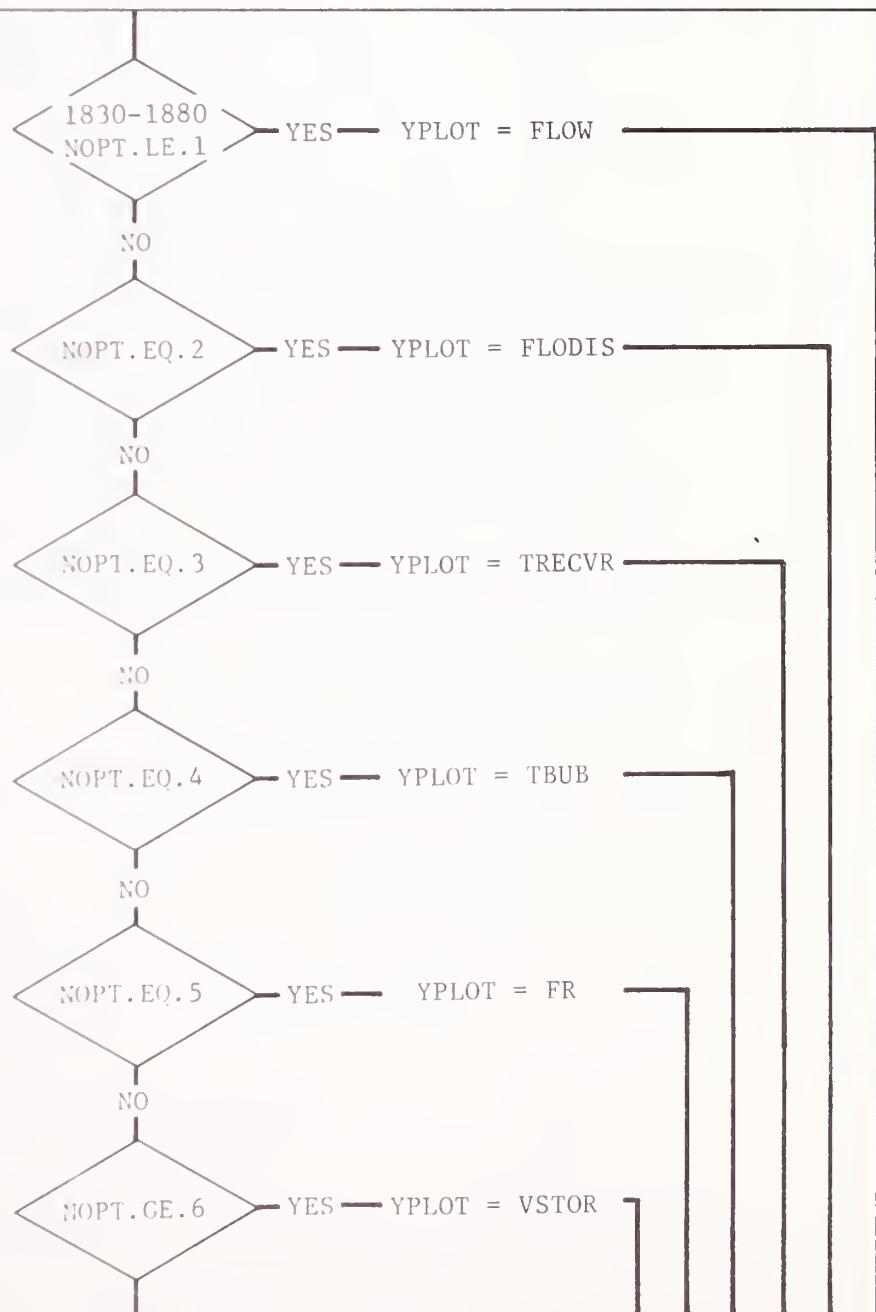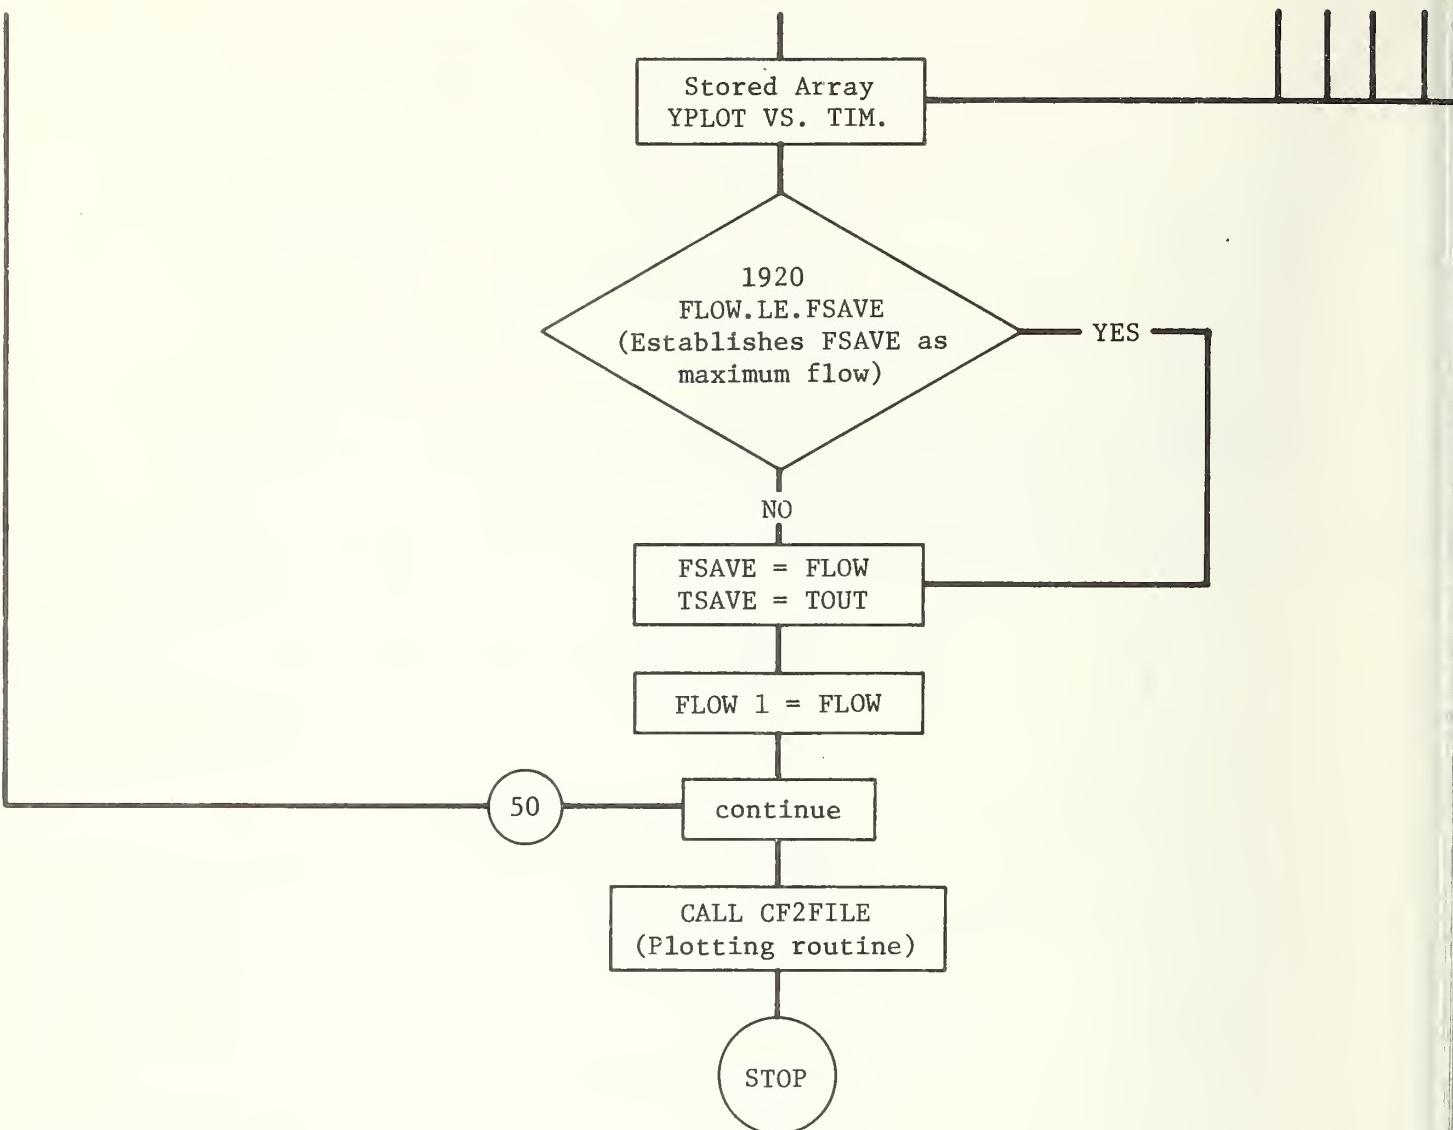
*Calculation by subroutine in CFSUB or HPROP

CF - Computer Listing Symbols

AO	Coefficient of $FLOW^2$ terms
AQ	Heat transfer surface area, ft^2
BO	Coefficient of $FLOW^1$ terms
CO	Coefficient of $FLOW^0$ terms
COEF	Coefficient of $FLOW^2$ frictional terms only
DELV	Incremental flow out of storage in DT, gal
DENSL	Density of LH_2, lb/ft^3
DT	Time increment, sec
D1-D7	Inside diameters, in
EDIS	Dissipated energy, pump, and friction, Btu/lb
EFF	Pump efficiency
EFRIC	Energy dissipated in pipe friction only, Btu/lb
EIN	Inlet enthalpy, Btu/lb
EOS	Saturation enthalpy at outlet condition, Btu/lb
EOUT	Outlet enthalpy, Btu/lb
EPMP	Energy dissipated due to pump inefficiency, Btu/lb
EQ	Enthalpy rise due to ambient heating, Btu/lb
ERR	Error in flow iteration
EXPO	Exponent in equation for FA
FA	Correction factor for non-linear valve opening characteristic
FLDIS(I)	Array for FLODIS
FLO(J)	Array for FLO
FLOAV	Flow averaged over the time increment, gal/min
FLODIS	Accumulated flow in receiving tank after subtracting quantity evaporated, gal
FLOW	Flow rate, gal/min
FLOW1	Flow rate, at the beginning of the time increment, gal/min
FLOR	Ratio of two phase to single phase flow rates
FLRA	Average of FLOR
FL86	Factor in equation for pump efficiency

2. CF

FOF	Fractional closing if discharge valve
FOPN(I)	Array for FSET
FPREV	Temporary storage symbol
FRPM	RPM dependent terms in equation for pump head
FSET	Valve setting at time I
HE	Exit head corresponding to absolute receiver pressure, ft
HDWDT	Head developed from momentum change, ft
HHR	Vertical rise at receiver end, ft
HFRIC	Friction head, ft
HLEV	Supply liquid level, ft
HO	Head corresponding to PRECVR–PULG, ft
HOLD	Old value of HO, ft
HTRY	Trial value of HLEV at time I
HUR	Relative humidity, percent
HUS	Specific humidity, grains/lb
NSTEP	Number of the time step
NVALV	Indicates type of valve (input data)
PD	Vapor pressure corresponding to dry bulk temperature
PHSCL	Pump head scaling factor
POUT	Pressure upstream from discharge valve, psia
POUTG	Gauge pressure equivalent of POUT, psig
PPEX	Pump discharge pressure, psig
PRECVR	Receiver pressure, psig
PSSCL	Pump speed scaling factor
PSTOR	Storage pressure of the supply liquid, psig
PSUB	Pressure in excess of the vapor pressure at the discharge, psig
PULG	Supply ullage pressure, psig
PVSCL	Pump volume flow scaling factor
QOA	Convection heat flux per unit area, Btu/hr·ft^2
QRAD	Radiation heat flux per unit area, Btu/hr·ft^2
RADI	Radicand (temporary storage)

3.

RPM	Pump RPM
RPM1(I)	Array for RPM
RSPH	Spherical tank radius, ft
TA	Atmospheric temperature, deg F
TBUB	Bubble cap temperature, deg R
TFRA	Time for computing fractional valve opening, sec
TIM	Actual time, sec
TIME(I)	Time of I'th change in conditions, sec
TME(J)	Array for TIM
TOS	Saturation temperature at outlet pressure, deg R
TOUT	Temperature upstream from discharge valve, deg F
TPRINT	Temporary storage for TIME(I)
TR	Absolute temperature corresponding to TA, deg R
TSTOR	Saturation temperature corresponding to PSTOR, deg R
TVENT	Vent gas temperature, deg R
VSTOR	Storage volume corresponding to HLEV, gal
VNT	Vent flow rate under static conditions, lb/sec
VTRY	Trial value in iteration for VSTOR, gal
WVFLO	Vent flow rate during fill, lb/sec
XK	Coefficient in pressure drop through restrictions
XL1-XL9	Pipe lengths, ft
X3	Coefficient of $FLOW^2$ in computing pressure drop at the discharge valve
XPX	Vapor pressure at the inlet, psia
XSOL	Ratio of length of pipe containing single phase liquid to total length

```
10$USE CFSUB;HPROP;PLOT;CF2FILE
20 COMMON FLOW1,XOD2,XOD5,DAV,XK,FA,DT,HLEV,RPM,HO,HHR
30 COMMON HUS,TA,WFPS,COEF,NSTEP,POUT
40 COMMON TME(105),YPLOT(105),NOPT,ITSAVE,IFSAVE,NPTS
50 COMMON DRE,PHSCL,PSSCL,PVSCL,GPM
60 DIMENSION TIME(6),FOPN(6),RPM1(6)
150 READ:XL1,XL2,XL3,XL4,XL5
160 READ:XL6,XL7,XL8,XL9,D1
170 READ:D2,D3,D4,D5,D6
180 READ: D7,GALR,VNT,H1,GPM
190 READ: PUMP,SPD,PSTOR,SVOL,NVAC
200 READ:QX
210 READ:PULG,IPST,NOPT,TIME(2),TIME(3)
220 READ:(TIME(I),I=4,6)
230 READ:(FOPN(I),I=1,5)
240 READ:FOPN(6)
250 READ:(RPM1(I),I=1,5)
260 READ:RPM1(6),NVALV
265 XEOF=XL8
270 222 CONTINUE
280 PHSCL=PUMP/400.
290 PSSCL=SPD/1700.
300 PVSCL=GPM/10000.
310 IF(PUMP.EQ.0.) PHSCL=1.
320 IF (SPD.EO.0.) PSSCL=1.
330 IF(GPM.EO.0.) PVSCL=1.
340 TIME(1)=0.
350 WIND=10.
360 FSAVE=0.
370 PRECVR=0.
380 HADD=0.
390 GAL=SVOL
400 CAP=900000.
410 IF(GAL.GE.CAP) GAL=0.99*CAP
420 RSPH=0.31794*CAP**0.333
430 VUL=CAP-GAL
440 HLEV=0.477465*VUL/(RSPH*RSPH)
450 HHR=XL4+XL5
460 DAV=(XL1*D1+XL2*D2+XL3*D3)/(12.*(XL1+XL2+XL3))
470 XPX=PSTOR+14.696
480 IF(IPST.GE.2)XPX=PULG+14.696
490 TSTOR=VATEMP(XPX)
500 DENSL=DEN(TSTOR)
510 DRE=(D1+D2+D3)/3.
520 ADD2=0.0
530 XOD2=XL1/(D1*D1)+XL2/(D2*D2)+XL3/(D3*D3)+ADD2
540 ADD5=XEOF/D3**5
550 XOD5=XL1/D1**5+XL2/D2**5+XL3/D3**5+ADD5
560 DT=TIME(6)/100.0
570 TIM=0.0
580 FLOW1=0.1
590 LIMIT=100
600 HE=(PRECVR+14.7)*144.0/DENSL
610 FLODIS=0.0
620 HO=(PRECVR-PULG)*144.0/DENSL
630 PUL=PULG+14.7
640 NSTEP=1
650 XPX=PSTOR+14.696
660 IF(IPST.GE.2) XPX=PULG+14.696
670 TSTOR=VATEMP(XPX)
```

```
 680  VSTOR=GAL
 690  EIN=ENTH(TSTOR,PUL,IIII)
 700  IF(NVAC.EQ.0) QOA=2.92
 710  IF(NVAC.EQ.1) QOA=16.2
 720  IF(NVAC.EQ.2) OOA=4230./DAV**0.25
 730  TR=460.+TA
 740  HADD=0.0
 750  AO=0.2618*(D1*XL1+D2*XL2+D3*XL3)+HADD
 760  OAMB=OOA*AO
 770  GO TO 12
 780  10 OAMB=0.0
 790  12 CONTINUE
 800  IF(NVALV.LE.1) EXPO=0.5
 810  IF(NVALV.EQ.2) EXPO=1.0
 820  IF(NVALV.GE.3)EXPO=2.0
 830  WVNT=VNT
 840  PRECVR=PVENT(WVNT,XL4,XL5,XL6,XL7,XL9,D4,D5,D6,D7,TBUB)
 845  PRCVRG=PRECVR-14.696
 890  DO 50 NSTEP=1,LIMIT
 900  FLOW=FLOW1
 910  TIM=TIM+DT
 930  DO 20 I=2,6
 940  IT=I
 950  IF(TIME(I).GT.TIM) GO TO 22
 960  20 CONTINUE
 970  GO TO 24
 980  22 DENOM=TIME(IT)-TIME(IT-1)
 990  IF(DENOM.EQ.0.0)DENOM=0.001
1000  TFRA=(TIM-TIME(IT-1))/(TIME(IT)-TIME(IT-1))
1010  FSET=FOPN(IT-1)+(FOPN(IT)-FOPN(IT-1))*TFRA
1020  RPM=RPM1(IT-1)+(RPM1(IT)-RPM1(IT-1))*TFRA
1030  ULP=PULG
1040  IF(GPM.EQ.0.)ULP=RPM
1050  HO=(PRCVRG-ULP)*144./DENSL
1052  PIF=1.41E-07*FLOW**2
1055  IF(ULP.GT.30.)HO=HO+PIF*144./DENSL
1060  24 FOF=1.0-FSET
1070  RPMS=RPM*PSSCL
1080  FRPM=-3.782475+0.0162881335*RPMS+0.2610459E-3*RPMS**2
1090  IF(FOF.LE.0.0)FOF=0.0000001
1100  IF(FOF.GE.1.0)FOF=0.999
1110  FA=1.0/(1.0-FOF**EXPO)**2-1.0
1120  DO 243 K=1,20
1130  AO=AF(D1,D5)
1140  BO=BF(DT)
1150  IF(NSTEP.EQ.1)BO=0.0
1160  CO=CF(RPMS)
1170  RAD1=BO**2-4.0*AO*CO
1180  IF(RAD1.GT.0.0) GO TO 25
1190  RAD1=0.0
1200  25 FLOW=(BO-SQRT(RAD1))/(2.0*AO)
1210  FLOMAX=35746.*PUL**0.817059
1220  IF(GPM.EQ.0.)FLOMAX=99999.
1230  IF(K.EQ.1.AND.FLOW.LT.FLOMAX) GO TO 244
1240  DH=-10.
1250  IF(K.GT.1)DH=(HOLD-HO)*(FLOMAX-FLOW)/(FLOLD-FLOW)
1260  HO=HO+DH
1270  HOLD=HO
1280  FLOLD=FLOW
1290  243 CONTINUE
1300  244 FLOS=FLOW/PVSCL
1310  27 HPHP=FRPM-0.4822511E-6*FLOS*ABS(FLOS)
1320  IF(GPM.EQ.0.)HPHP=0.
```

51

```
1330 IF (FLOW.GT.0.0) GO TO 30
1340 EFF=0.0
1350 EPMP=0.0
1360 FLOW=0.1
1370 GO TO 32
1380 30 FL86=2003.879+16.1913*HPMP-0.0106583*HPMP**2
1390&    +0.440906E-5*HPMP**3
1400 FLOAV=(FLOW+FLOW1)/2.
1410 RATIO=FLOW/FL86
1420 EFF=0.86-0.854997+2.312442*RATIO-2.363036*RATIO**2+0.9065751*
1430&     RATIO**3
1440 EPMP=1.2851E-3*HPMP*(1.0/EFF-1.0)
1450 32 HFRIC=COEF*FLOW**2
1460 IF(GPM.EQ.0.)HFRIC=0.
1470 PAI=PUL+(HLEV+HPMP-HFRIC)*DENSL/144.
1480 TIS=VATEMP(PAI)
1490 EIS=ENTH(TIS,PAI,IVI)
1500 EFRIC=1.2851E-3*HFRIC
1510 EDIS=EPMP+EFRIC
1520 EO=0.12466*QAMB/FLOW/DENSL
1530 EOUT=EIN+EPMP+EFRIC+EO
1540 XSOL=(EIS-EIN)/(EIS-EIN+EOUT-EOS)
1550 IF(XSOL.LT.0.)XSOL=0.
1560 IF(XSOL.GT.1.)XSOL=1.
1570 X3=7.198E-3*FA/D3**4
1580 HDWDT=0.1360195*(FLOW-FLOW1)
1590 POUT=(HE+X3*FLOW**2)*DENSL/144.
1595 IF(ULP.GT.30.)POUT=POUT+PIF
1600 POUTG=POUT-14.7
1610 TOUT=TEMP(EOUT,POUT,FR)
1620 TVNT=TEMP(EOUT,PRECVR,FRV)
1630 DVAP=0.18635*PRECVR/TVNT
1640 WVFLO=VNT+2.228E-03*FLOW*(FRV*DENSL+(1.-FRV)*DVAP)
1650 PRECVR=PVENT(WVFLO,XL4,XL5,XL6,XL7,XL9,D4,D5,D6,D7,TBUB)
1660 TOS=VATEMP(POUT)
1670 EOS=ENTH(TOS,POUT,IVO)
1680 FLRA=0.5*(FLOR(FR,TOUT,POUT)*(1.-XSOL)+1.+XSOL)
1690 IF(FLRA.LT.0.1)FLRA=0.1
1700 IF(FLRA.GT.1.0)FLRA=1.0
1710 FLOW=FLOW*FLRA
1720 PEX=PRECVR+14.7
1730 TRECVR=VATEMP(PRECVR)
1740 DELV=DT*FLOAV
1750 FLODIS=FLODIS+DELV
1760 PSUB=POUT-VAPO(TOUT)
1770 VSTOR=VSTOR-DELV
1780 IF(VSTOR.LE.0.0) GO TO 983
1790 VUL=CAP-VSTOR
1800 HLEV=2.*RSPH-0.477465*VUL/(RSPH*RSPH)
1810 PPEX=PULG+(HLEV+10.-2.2127E-8*FLOW**2+HPMP)*DENSL/144.
1820 40 THE(NSTEP)=TIM
1830 IF(NOPT.LE.1) YPLOT(NSTEP)=FLOW
1840 IF(NOPT.EQ.2) YPLOT(NSTEP)=FLODIS
1850 IF(NOPT.EQ.3) YPLOT(NSTEP)=TRECVR
1860 IF(NOPT.EQ.4) YPLOT(NSTEP)=TBUB
1870 IF(NOPT.EQ.5) YPLOT(NSTEP)=FR
1880 IF(NOPT.GE.6) YPLOT(NSTEP)=VSTOR
1895 DPO=HO*DENSL/144.0
1920 IF(FLOW.LE.FSAVE) GO TO 45
1930 FSAVE=FLOW
1940 TSAVE=TOUT
1950 45 FLOW1=FLOW
1960 NPTS=NSTEP
```

```
1970 50 CONTINUE
1980 983 TME(NPTS+1)=TIME(6)
1990 IFSAVE=FSAVE
2000 ITSAVE=TSAVE
2010 TME(NPTS+2)=0.0
2020 CALL CF2FILE
2030 999 STOP
2040 END
```

Subroutine CF2FILE

Graph Headings and Labels for CF

```
10 SUBROUTINE CF2FILE
20 COMMON FLOW1,XOD2,XOD5,DAV,XK,FA,DT,HLEV,RPM,HO,HHR
30 COMMON HUS,TA,WFPS,COEF,NSTEP,POUT
40 COMMON TME(105),YPLOT(105),NOPT,ITSAVE,IFSAVE,NPTS
50 ASCII A(42),B(14),C(7)
60 ENCODE (B,10)
70 10 FORMAT(56X)
80 GO TO (1,2,3,4,5,6),NOPT
90 1 ENCODE (C,11)
100 11 FORMAT(7X,"FLOW RATE GPM",8X)
110 ENCODE(B,17) IFSAVE,ITSAVE
120 17 FORMAT(4X,"DISCHARGE TEMP AT A FLOW OF",I6," GPM WAS",I4," R",5X)
130 GO TO 7
140 2 ENCODE (C,22)
150 22 FORMAT("TOTAL LIQUID DISCHARGED GAL ")
160 GO TO 7
170 3 ENCODE (C,33)
180 33 FORMAT("RECEIVER LIQUID TEMP DEG R   ")
190 GO TO 7
200 4 ENCODE (C,44)
210 44 FORMAT ("BUBBLE CAP TEMPERATURE DEG R")
220 GO TO 7
230 5 ENCODE (C,55)
240 55 FORMAT(" FINAL VAPOR MASS FRACTION   ")
250 GO TO 7
260 6 ENCODE (C,66)
270 66 FORMAT("REMAINING LIQUID VOLUME GAL ")
280 7 ENCODE (A,73) B
290 73 FORMAT(8X,"STEADY OPERATION AND TRANSIENT RESPONSE",20X,
300& "TO CHANGES IN OPERATING CONDITIONS",11X,14A4)
310 IF(NPTS.LT.100) ENCODE (A,75) B
320 75 FORMAT(8X,"STEADY OPERATION AND TRANSIENT RESPONSE",17X,
330& "LIQUID SUPPLY DEPLETED BEFORE FINAL TIME",8X,14A4)
340 ENCODE (B,77)
350 77 FORMAT(20X,"TIME IN MINUTES",21X)
360 YPLOT(NPTS+1)=0.0
370 YPLOT(NPTS+2)=YPLOT(1)
380 CALL GRAPH (A,B,C,NPTS,TME,YPLOT)
390 RETURN
400 END
```

```
10 FUNCTION AF(D1,D5)
20 COMMON FLOW1,XOD2,XOD5,DAV,XK,FA,DT,HLEV,RPM,HO,HHR,
30&HUS,TA,WFPS,COEF,NSTEP,POUT
35 COMMON TME(105),YPLOT(105),NOPT,ITSAVE,IFSAVE,NPTS
40 COMMON DRE,PHSCL,PSSCL,PVSCL,GPM
50 FPMP=PHSCL/PVSCL**2
60 IF(GPM.EQ.0.) FPMP=0.
70 IF (NSTEP.GT.1)GO TO 20
80 PDI=2.2170401E-08*FPMP
90 PC4=4.82251154E-07*FPMP
100 PDC=3.109385599E-2
110 RC=2.5911E-3
120 TC=7.198E-3
130 X10=XOD5*PDC
140 20 RE=FLOW1*15359./DRE
150 IF(RE.LT.3.0E+03) RE=3.0E+3
160 F=0.0055*(1.0+(2.77+1.E+06/RE)**0.33333)
170 X1=F*X10
180 X3=TC*FA/D5**4
190 COEF=PDI+X1+X3
200 AF=-PC4-COEF
210 RETURN
220 END
230 FUNCTION BF(X)
240 COMMON FLOW1,XOD2,XOD5,DAV,XK,FA,DT,HLEV,RPM,HO,HHR,
250&HUS,TA,WFPS,COEF,NSTEP,POUT
260 CM=2.1147E-04*XOD2
270 BF=CM/DT
280 RETURN
290 END
300 FUNCTION CF(X)
310 COMMON FLOW1,XOD2,XOD5,DAV,XK,FA,DT,HLEV,RPM,HO,HHR,
320&HUS,TA,WFPS,COEF,NSTEP,POUT
330 CM=2.1147E-04*XOD2
340 PC3=2.610459E-4
350 PC2=1.628813355E-2
360 PC1=3.782475
370 RPMSC=RPM*PSSCL
380 X1=PC2*RPMSC
390 X2=PC3*RPMSC**2
400 X3=CM*FLOW1/DT
410 IF(FLOW1.EQ.100.)X3=0.0
420 FPMP=(-PC1+X1+X2)*PHSCALE
430 CF=HLEV-PC1+X1+X2-HO-HHR+X3
440 RETURN
450 END
```

Hydrogen Properties, Vent and Two Phase Flow Functions for CF

```
10 FUNCTION VAPO(TR)
20 DIMENSION B(4)
30 DATA B/2.0062,50.09708,1.0044,.01748495/
40 T=TR/1.8
50 VALOG=B(1)-B(2)/(T+B(3))+B(4)*T
60 VATM=10.**VALOG
70 VAPO =VATM*14.696
80 RETURN
90 END
100 FUNCTION XLH(PO)
110 IF(PO.GE.187.5) XLH=0.01
120 IF(PO.LT.187.5)XLH=20.6577*(187.5-PO)**0.427612
130 RETURN
140 END
150 FUNCTION DPDTVP(T)
160 TK=T/1.8
170 PVA=VAPO(T)/14.696
180 ELOG=0.434294
190 DERIV=PVA/ELOG*(50.09708/(TK+1.0044)**2+0.01748495)
200 DPDTVP=DERIV*14.696/1.8
210 RETURN
220 END
230 FUNCTION ENTH(T,PSI,IF)
240 DIMENSION A(4)
250 TK=T/1.8
260 P=PSI/14.696
270 DATA A/-0.05720323,2.794294,-61.70376,-70.95291/
280 C=32.72-TK
290 HSAT=A(1)*C**3+A(2)*C**2+A(3)*C+A(4)
300 PSAT=VAPO(T)/14.696
310 BT1=0.00232108*TK*TK-0.0897882*TK+0.831432
320 BT2=-0.0748928*TK*TK+2.764046*TK-21.88605
330
340 PX=P-PSAT
350 HOFP=BT1*PX*PX+BT2*PX
360 ENTH=0.213377*(HSAT+HOFP)
370 IF=1
380 IF(P.GT.PSAT)RETURN
390 IF=0
400 ENTH=HSAT*0.221968
410 RETURN
420 END
430 FUNCTION VATEMP(POBS)
440 PLOG=0.43429448*ALOG(POBS/14.696)
450 C1=2.01818
460 C2=3.96617
470 C3=7.43630
480 C4=0.0349699
490 TK=(PLOG-C1+SQRT(PLOG*PLOG-C2*PLOG+C3))/C4
500 VATEMP=TK*1.8
510 RETURN
520 END
530 FUNCTION TEMP(H,P,FR)
540 5 T1=VATEMP(P)
550 H1=ENTH(T1,P,IF)
560 XL =XLH(P)
570 FR=(H-H1)/XL
580 TEMP=T1
590 IF(FR.GT.1.0) FR=1.0
600 IF (FR.GE.0.0)RETURN
610 FR=0.0
620 10 DO 40 L=1,20
630 12 T2=T1-0.001
```

55

```
640  14 H1=ENTH(T1,P,IF)
650  16 H2=ENTH(T2,P,IX)
652  18 A=(T1-T2)/(H1-H2)
655     ERR=(H1-H)/H
660  20 IF(ABS(ERR).LT.0.001) GO TO 42
680  22 T1=T1-(H1-H)*A
690  40 CONTINUE
700     PRINT 100
710  42 TEMP=T1
720     RETURN
730 100 FORMAT("  SUBROUTINE TEMP DID NOT CONVERGE   ")
740     END
750     FUNCTION DEN(TSTOR)
760     D0=5.343989
770     D1=-7.70289E-03
780     D2=-5.138191E-04
790     DEN=D0+D1*TSTOR+D2*TSTOR*TSTOR
800     RETURN
810     END
820     FUNCTION PVENT(WVNT,XL4,XL5,XL6,XL7,XL9,D4,D5,D6,D7,TBUB)
830     DIMENSION TAV(4),FDP(4)
835     REAL KE
840     KE=-1.475E-05
850     TU=36.
860     DO 110 J=1,4
870     GO TO (102,103,104,105),J
880 102 XL=XL4
890     D=D4
900     GO TO 106
910 103 XL=XL5
920     D=D5
930     GO TO 106
940 104 XL=XL6
950     D=D6
960     GO TO 106
970 105 XL=XL7
980     D=D7
990     KE=-4.468E-05
1000 106 TR=540.-(540.-TU)*EXP(KE*D*XL/WVNT)
1004     EXPO=EXP(KE*D*XL/WVNT)
1010     TAV(J)=(TU+TR)/2.
1020     TU=TR
1030     TK=TR/1.8
1040     VIS=-0.0960808E-07*TK**4+0.0792293E-04*TK**3-0.2562415E-02*TK*TK
1050&    +0.6147894*TK-0.4933261
1060     VISC=2.4191E-04*VIS
1070     FDP(J)=0.90199*XL*VISC**0.2*WVNT**1.8/D**4.8
1080 110 CONTINUE
1090     TBUB=TR
1100     PDN=PVENT
1110     PAV=14.696
1120     PDN=14.696
1130     DO 126 K=1,4
1140     I=5-K
1150     DO 120 J=1,20
1160     DGAS=0.18635*PAV/TAV(I)
1170     DP=FDP(I)/DGAS
1180     PNEW=PDN+0.5*DP
1190     PVENT=PDN+DP
1200     IF(ABS(PNEW-PAV)/PNEW.LT.0.0001) GO TO 126
1210     PAV=PNEW
1220 120 CONTINUE
1230     PRINT:"PVENT FAILED TO CONVERGE"
```

56

```
1240 PVENT=14.696
1250 GO TO 127
1260 126 CONTINUE
1270 127 RETURN
1280 END
1300 FUNCTION FLOR(FR,TOUT,POUT)
1310 IF(FR.GT.0.00001)YF=SQRT(ABS((1.-FR)/FR))
1315 IF (FR.LE.0.00001)YF=0.0
1320 BTA=1./(1.+0.37988*YF)
1330 TH=0.875988+7.9440*EXP(-16.32928*(BTA-0.5)**2)
1340 IF(TH.LE.1.0)TH=1.0
1350 DR=DEN(TOUT)*TOUT/0.18635/POUT
1360 SRTH=SQRT(ABS(TH))
1370 SRD=SQRT(ABS(0.59941*DR*FR**1.8+(1.-FR)**1.8))
1380 FLOR=1.0/SRTH/SRD
1390 RETURN
1400 END
```

Plotting Subroutine for all Programs

```
10 SUBROUTINE GRAPH (A,B,C,N,X,Y)
20 DIMENSION A(42),B(14),C(7),X(103),Y(103),S(12)
30 ASCII A,B,C,S
40 IF (N.GT.0) GO TO 7
50 PRINT 3
60 1 RETURN
70 3 FORMAT(1X,"&&")
80 7 PRINT 10,A,B,C
90 10 FORMAT(1X,"&",14A4)
100 L=N+2
110 XH=X(1)
120 XL=X(1)
130 YH=Y(1)
140 YL=Y(1)
150 DO 20 I=2,L
160 IF(X(I).GT.XH) XH=X(I)
170 IF(X(I).LT.XL) XL=X(I)
180 IF(Y(I).GT.YH) YH=Y(I)
190 IF(Y(I).LT.YL) YL=Y(I)
200 20 CONTINUE
210 CALL SCALE (XL,XH,S)
220 PRINT 11,S
230 CALL SCALE (YL,YH,S)
240 11 FORMAT(1X,"&",2A4,4X,2A4,3X,2A4,4X,2A4,3X,2A4,4X,2A4)
250 DO 22 I=1,12,2
260 22 PRINT 10,S(I),S(I+1)
270 DX=(XH-XL)/800.
280 DY=(YH-YL)/600.
290 27 FORMAT(1X,"&",2I4)
300 DO 33 I=1,N
310 IX=130.5+(X(I)-XL)/DX
320 IY=66.5+(Y(I)-YL)/DY
330 33 PRINT 27,IX,IY
340 PRINT 3
350 44 READ:IX
360 IF(IX-1) 44,1,47
370 47 XV=XL+(IX-130)*DX
380 DO 55 I=2,N
```

```
390 IF(XV.LE.X(I)) GO TO 66
400 55 CONTINUE
410 I=N
420 66 YV=(XV-X(I-1))/(X(I)-X(I-1))*(Y(I)-Y(I-1))+Y(I-1)
430 PRINT 77,XV,YV
440 77 FORMAT(1X,"&X =",1PE9.2,",    Y =",E9.2)
450 GO TO 44
460 END
470 SUBROUTINE SCALE (XL,XH,S)
480 DIMENSION S(12),T(2)
490 ASCII S,T
500 I=ALOG(XH-XL)/2.3025851
510 I=I-1
520 D=10.0**I
530 IF(XL)7,8,8
540 7 IL=XL/D-.999
550 GO TO 9
560 8 IL=XL/D
570 9 IF(XH) 11,11,12
580 11 IH=XH/D
590 GO TO 13
600 12 IH=XH/D+.999
610 13 J=(IH-IL+4)/5
620 XL=IL*D
630 XH=XL
640 IF (I) 14,17,18
650 14 IF(I+2) 16,19,15
660 15 I=4
670 GO TO 20
680 16 I=1
690 GO TO 20
700 17 I=2
710 GO TO 20
720 18 IF(I.GT.6) GO TO 16
730 I=3
740 GO TO 20
750 19 I=5
760 20 DO 30 K=1,12,2
770 GO TO (21,22,23,24,25),I
780 21 ENCODE (T,31) XH
790 GO TO 27
800 22 ENCODE (T,32) XH
810 GO TO 27
820 23 IE=XH
830 ENCODE (T,33) IE
840 GO TO 27
850 24 ENCODE (T,34) XH
860 GO TO 27
870 25 ENCODE (T,35) XH
880 27 S(K)=T(1)
890 S(K+1)=T(2)
900 30 XH=XH+J*D
910 XH=XL+5*J*D
920 RETURN
930 31 FORMAT(1PE8.1)
940 32 FORMAT(F8.1)
950 33 FORMAT(I8)
960 34 FORMAT(F8.2)
970 35 FORMAT(F8.3)
980 END
```

Program DATFILE
Prints Date and Time on Input and Output Figures

```
10  DIMENSION DATE(2)
20  CALL DATE#TIME(DATE,TIME)
30  PRINT 10, DATE, TIME
40  10 FORMAT(X,1H&,2A4,F8.3)
50  END
```

U.S. DEPT. OF COMM. BIBLIOGRAPHIC DATA SHEET	1. PUBLICATION OR REPORT NO. NBSIR 75-820	2. Gov't Accession No.	3. Recipient's Accession No.

4. TITLE AND SUBTITLE STUDY OF CRYOGENIC PROPELLANT SYSTEMS FOR LOADING THE SPACE SHUTTLE - PART II, HYDROGEN SYSTEMS	5. Publication Date October 1975
	6. Performing Organization Code 275.05.

7. AUTHOR(S) W. G. Steward	8. Performing Organ. Report No. NBSIR 75-820

9. PERFORMING ORGANIZATION NAME AND ADDRESS NATIONAL BUREAU OF STANDARDS DEPARTMENT OF COMMERCE WASHINGTON, D.C. 20234	10. Project/Task/Work Unit No. 2750458
	11. Contract/Grant No. CC-37171A

12. Sponsoring Organization Name and Complete Address (Street, City, State, ZIP) National Aeronautics and Space Administration John F. Kennedy Space Center Kennedy Space Center, Florida 32899	13. Type of Report & Period Covered Final
	14. Sponsoring Agency Code

15. SUPPLEMENTARY NOTES

16. ABSTRACT *(A 200-word or less factual summary of most significant information. If document includes a significant bibliography or literature survey, mention it here.)*

    This report covers computer simulation studies of liquid hydrogen fill and vent systems for the space shuttle. The computer programs calculate maximum and minimum permissible flow rates during cooldown as limited by thermal stress considerations, fill line cooldown time, pressure drop, flow rates, vapor content, vent line pressure drop and vent line discharge temperature. The input data for these programs are selected through graphic displays which schematically depict the part of the system being analyzed. The computed output is also displayed in the form of printed messages and graphs. Digital readouts of graph coordinates may also be obtained.

    Procedures are given for operation of the graphic display unit and the associated minicomputer and timesharing computer.

17. KEY WORDS *(six to twelve entries; alphabetical order; capitalize only the first letter of the first key word unless a proper name; separated by semicolons)*
    Computer modeling; cooldown; cryogenic flow; stresses; two phase flow.

18. AVAILABILITY [X] Unlimited	19. SECURITY CLASS (THIS REPORT) UNCLASSIFIED	21. NO. OF PAGES 64
☐ For Official Distribution. Do Not Release to NTIS		
☐ Order From Sup. of Doc., U.S. Government Printing Office Washington, D.C. 20402, SD Cat. No. C13	20. SECURITY CLASS (THIS PAGE) UNCLASSIFIED	22. Price $4.25
[X] Order From National Technical Information Service (NTIS) Springfield, Virginia 22151		